

**NASA TECHNICAL  
MEMORANDUM**

**NASA TM X-71978**  
COPY NO.

**NASA TM X-71978**

**A SHUTTLE DEVELOPMENT-FLIGHT-TEST VEHICLE STUDY.**

**Robert W. Rainey, John J. Rehder, and Phillip J. Klich**

**June 1974**

**(NASA-TM-X-71978) A SHUTTLE DEVELOPMENT  
FLIGHT-TEST VEHICLE STUDY (NASA) 37 P  
CSCL 22B**

**N74-29292**

**Unclas  
G3/31 54126**

This informal documentation medium is used to provide accelerated or special release of technical information to selected users. The contents may not meet NASA formal editing and publication standards, may be revised, or may be incorporated in another publication.

**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
LANGLEY RESEARCH CENTER, HAMPTON, VIRGINIA 23665**

1. Report No. NASA TM X-71978		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle  A Shuttle Development-Flight-Test Vehicle Study				5. Report Date June 1974	
				6. Performing Organization Code	
7. Author(s) Robert W. Rainey, John J. Rehder, and Phillip J. Klich				8. Performing Organization Report No.	
9. Performing Organization Name and Address  NASA Langley Research Center Hampton, VA 23665				10. Work Unit No.	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address  NASA				13. Type of Report and Period Covered Technical Memorandum	
				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract  A study has been completed that identifies the potential performance capability of the production shuttle orbiter for powered flight tests using several propulsion systems following vertical takeoff and using J-2 rocket engines following air launch. Of the approaches considered, the air-launched orbiter equipped with J-2 rocket engines appeared to have the highest potential for early shuttle development flights. With this approach, Mach 4 appeared attainable using 45.5K kg (100K lb) of internal propellant. Several issues were identified that require resolution to prove feasibility.					
17. Key Words (Suggested by Author(s)) (STAR category underlined) 31 <u>Space Vehicles</u> 01 <u>Aerodynamics</u> 28 <u>Propulsion Systems</u>				18. Distribution Statement  Unclassified - Unlimited	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		22. Price* \$3.25	

\*Available from (The National Technical Information Service, Springfield, Virginia 22161  
STIF/NASA Scientific and Technical Information Facility, P.O. Box 33, College Park, MD 20740

## A SHUTTLE DEVELOPMENT-FLIGHT-TEST VEHICLE STUDY

Robert W. Rainey, John J. Rehder,  
and Phillip J. Klich

### SUMMARY

A study has been completed that identifies the potential performance capability of the production shuttle orbiter for powered flight tests using several propulsion systems following vertical takeoff and using J-2 rocket engines following air launch. Of the approaches considered, the air-launched orbiter equipped with J-2 rocket engines appeared to have the highest potential for early shuttle development flights. With this approach, Mach 4 appeared attainable using 45.5K kg (100K lb) of internal propellant. Several issues were identified that require resolution to prove feasibility.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

## INTRODUCTION

A study has been recently completed at the Langley Research Center to identify the performance potential of a production shuttle orbiter retrofitted for development flights. To avoid delays in shuttle development tests which might result from waiting for space shuttle main engine (SSME) delivery, the J-2 liquid rocket engine and a modified 1205 solid rocket were considered as alternate propulsion systems. These were the only available propulsion systems that appeared to have potential compatibility with the orbiter to meet a development-flight-test objective of obtaining aerodynamic flight data into the supersonic regime. Emphasis was given to providing gradual penetration of the high-angle-of-attack regime and to taking at least an initial step in the demonstration of the angle-of-attack transition maneuver. Pilot familiarization and training as well as onboard system verification tests would also be accomplished inflight rather than by ground simulations. This approach to orbiter development flight testing encompasses the subsonic program presently envisioned; and, although more complex and costly than that program, it increases mission reliability in preparation for the first orbital flight following vertical launches. A detailed econometric and safety analysis will be required to identify the cost increase and shuttle schedule impact of this approach as well as the reduction in risk.

Two operational modes were investigated during this study: vertical takeoff (VTO) and air launched, the latter (suggested by Flight Research Center personnel) requiring a mothership to tow or carry the shuttle orbiter to altitude. Within the scope of this limited study, the primary emphasis was given to the ascent performance capability, vehicle weight, and systems layouts. Brief consideration was given to the launch site and test range requirements for the VTO mode of operation. It was assumed that the aerodynamic and maneuver capability and the thermal protection system of the orbiting version will accommodate the requirements for development and research flights. The Rockwell International shuttle orbiter with a dry weight of about 68K kg (150K lb) and a reference length,  $l$ , of 33.73 m (1,328 in) was used as the baseline vehicle. Where appropriate, all systems that were necessary for orbiting missions but had no function for shuttle development flight testing were removed; for several systems, such as the environmental control and reaction control systems still necessary for the development flights, the consumable weights were reduced to reflect the shorter time of operation. Although the baseline orbiter weights, subsystems, etc., are continually changing, it is believed that the results obtained herein are representative of the development flight test performance of the final shuttle orbiter, barring major changes in the orbiter configuration, its weight, or mode of operation.

## RESULTS AND DISCUSSION

In order to evaluate the potential of retrofitting the production orbiter for development flight tests and to calculate performance, the weights and center-of-gravity (c.g.) locations had to be estimated for the altered versions. This was accomplished utilizing the three primary modes of propulsion considered in the study: the 3.05 m (120-in.) diameter, five-segment solid rocket motor (1205 SRM), the J-2 liquid rocket engine, and the space shuttle main engines (SSME). In considering the weights and systems layouts using each of these propulsion modes, it was necessary to adapt the propulsion systems to the orbiter; and, in all cases (including the three SSMEs), some alteration of the aft part of the orbiter was necessary. This will be elaborated upon subsequently. Figure 1 summarizes the weights and c.g. locations of the development-flight-test versions in comparison with values for a baseline Rockwell International orbiter. For the 1205 SRM, the words "External" and "Internal" refer to the SRM mounted below the orbiter and within the interior of the orbiter, respectively. For the J-2 and SSME installations, "External" and "Internal" refer to the LOX/LH propellant tanks installed below the orbiter and within the payload bay, respectively. Because of the installation and operational complexities identified during the initial considerations of the 1205 SRM for the VTO mode, no trajectories were calculated, and no consideration was given to the use of the 1205 SRM in the air-launched mode.

## Vertical Takeoff (VTO)

Using the weights from figure 1 and Table I for each of the propulsion systems considered, the Program for Optimized Shuttle Trajectories (POST) (reference 1) was used to obtain the maximum burnout velocities at specified altitudes. Both maximum relative and ideal velocities are summarized in figure 2; the velocity increment between the two is approximately 1830 m/sec (6,000 ft/sec) for each system and is predominantly representative of gravity and aerodynamic-drag losses. For the trajectories calculated, the maximum total acceleration was 3.09; the maximum dynamic pressure ( $q$ ) was 31.1K N/m<sup>2</sup> (650 lb/ft<sup>2</sup>); and the maximum dynamic pressure times angle of attack ( $q\alpha$ ) was 134K N/m<sup>2</sup>-deg (2,800 lb/ft<sup>2</sup>-deg). The maximum values of acceleration and  $q$  were limited to those of the orbiting version, and the value of  $q\alpha$  was approximately 2/3 of that used for ascent in dusty air and wind-shear conditions along the baseline ascent trajectory.

Details of each VTO concept follow:

**Solid Rocket Powered.**— Two installations of the United Technology 1205 SRM (used on the Titan IIIC launch vehicle) were considered. On the externally-mounted version (figure 3(a)), with a 10° nozzle cant angle, the thrust is directed between the liftoff and burnout c.g. locations; approximately  $\pm 4\text{--}1/2^\circ$  of thrust vectoring are required to track the center-of-gravity location from liftoff to burnout. The present 1205 SRM has  $\pm 6^\circ$  thrust vector control available through liquid injection, and it is

questionable whether this would be sufficient to provide ascent trajectory and flight control for all wind conditions. Early thrust termination may be provided through blowout patches. Relatively large negative angles of attack would result during ascent. Following staging, the center of gravity is at approximately 0.60 $\lambda$  (figure 1(a)); thus, about 11.3K kg (25K lbs) of ballast aft of the orbiter thrust structure would be required to shift the c.g. to 0.65 $\lambda$  (the forward limit of the baseline orbiter). For the internally-mounted SRM (figure 3(b)), major thrust structure alteration is necessary. No thrust termination is believed feasible, and the orbiter entry weight is about 18K kg (40K lbs) greater than for the baseline (figure 1(a)). No ascent trajectories were calculated for either of these solid rocket motor configurations, and they are not recommended for further consideration.

J-2 Powered. - Because of the smaller overall dimensions of the J-2 engines relative to those of the SSME, modifications to the baseline engine mounts are necessary to move the exit planes of the J-2s aft (figure 4). With the J-2 installation, thrust termination is potentially available for 1, 2, or 3 engines. In addition, about 20 percent thrust reduction can be achieved by reducing the mixture ratio from 5.5 to 4.5 with an increase in specific impulse, Isp. Therefore, a considerable variation of total thrust may be achieved by combinations of mixture control and engine shutoff. The estimated center-of-gravity at liftoff is at approximately 0.50 $\lambda$  with a gross liftoff weight of 156K kg (344K lb). Burnout weight is about 67K kg (147K lb) with the c.g. at 0.64 $\lambda$ ; some ballast is necessary to shift the center of gravity back to about 65 or 66 percent  $\lambda$  for compatibility with the orbiting version. For the three J-2-powered, VTO concept, the available sea-level thrust was 219K kg (483K lb). The ascent propellant weight was based on providing a liftoff thrust-to-weight ratio (T/W) of 1.40. The maximum relative velocity predicted for this J-2 installation was about 1675 m/sec (5500 ft/sec) at a burnout altitude of about 45.7 km (150K feet) (figure 5). Basic trajectory parameters for this burnout altitude are presented in figure 6. For the three trajectories calculated, the maximum angle of attack never exceeded  $\pm 1^\circ$  resulting in  $q_a < 2400 \text{ N/m}^2\text{-deg}$  (50 lb/ft<sup>2</sup>-deg). During the ascent when the acceleration reached 3, one engine was shut down; although no thrust modulation via mixture-ratio variation was used, this approach could provide fine-tuning of the trajectories. For all trajectories calculated, the flight path angle at burnout increased with altitude reaching a value of  $39^\circ$  at a burnout altitude of 61K m (200K feet); this parameter, along with several others, is important in establishing the initial conditions for the glide flight. Rocket burn time was approximately 135 seconds; the range at burnout for the three trajectories varied between 46 and 63 km (25 and 34 n.mi.).

The J-2 engines were designed for high-altitude start and operation with the S-II and S-IV stages of the Saturn V launch vehicle. In considering their use at low altitudes, transient lateral loads resulting from asymmetric flow separation in the nozzle during thrust buildup and termination must be considered. Personnel of Rocketdyne Division of Rockwell International have stated through private communications that these transients are significant and damage can result to the actuation and gimbal

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR.

mechanisms. For starting, a nozzle support structure attached to the launch pad, similar to the present ground-testing arrangement, could be used. After the full chamber pressure of  $4.7 \times 10^6 \text{ N/m}^2$  (680 lb/in<sup>2</sup>) is reached, this support structure may be released, and no further separation problems during start is anticipated. The transient shutdown loads must be reckoned with, however. Rocketdyne personnel have also warned of the problem of excessive LOX head at the pump inlets which, for this installation, would very likely require suppression valves. The ability to start and operate the J-2, including the impact of accelerations to 3 g's, requires study.

SSME Powered.— With two SSMEs and internal propellant tanks (figure 7), the gross liftoff and the propellant weights were slightly higher than for the J-2 installation because the SSMEs operate at a mixture ratio of 6.0 (compared to 5.5 for the J-2s). A maximum relative velocity of about 2225 m/sec (7300 ft/sec) was achieved at a burnout altitude of 61K m (200K ft) without exceeding the afore-mentioned maximum values of acceleration,  $q$ , and  $q\alpha$  (see figure 8). Ninety-one percent of maximum sea level thrust was used at liftoff; at an altitude of 1220 m (4000 ft), both engines were throttled to 80 percent with subsequent throttling to 50 percent to constrain acceleration to  $< 3g$ . Burnout flight-path angle increased with burnout altitude, reaching  $33^\circ$  at 61 km (200K ft).

With SSME installations (2 or 3 engines) and with internal propellant tanks, the engine gimbal points were shifted upward so that with the thrust directed through the center of gravity and with full gimbal capability, the lower portion of the exit plane of the nozzle cleared the body flap. No additional weight to account for this modification was included. With the removal of the upper SSME, the center of gravity moved forward resulting in the entry and landing c.g. locations at about 0.64 $\lambda$  (figure 1(a)); again, use of ballast would be anticipated to shift the c.g. aft. The entry and landing weights of 66.7K kg (147K lb) and 64.9K kg (143K lb), respectively, were about 4.5K kg (10K lb) below those of the baseline orbiter without payload.

Using three SSMEs at liftoff with full sea level thrust and a slightly lower liftoff T/W ( $\sim 1\text{--}1/4$ ), the allowable GLOW was 401.4K kg (885K lb). The majority of the GLOW increase went into ascent propellant. Since the payload-bay volume of approximately 283 m<sup>3</sup> ( $\sim 10\text{K ft}^3$ ) accommodated only about 90.7K kg (200K lb) of propellant, all of the 318K kg ( $\sim 700\text{K lb}$ ) of LOX-hydrogen was contained in an external tank 43.3 m (142 ft) long (figure 9); an off-loaded baseline external tank could also be considered. With this propellant loading, a relative velocity at burnout in excess of 4875 m/sec (16K ft/sec) was achieved (figure 5). The burnout weight (including external tank) was 85.3K kg (188K lb). Burn time was approximately 266 seconds, and burnout occurred approximately 445 km (240 n.mi.) downrange for the three burnout altitudes. Because of the low c.g. location, angles of attack were positive throughout the ascents and never exceeded  $15^\circ$ ; the maximum  $q\alpha$  was constrained to 120K N/m<sup>2</sup>-deg (2500 lb/ft<sup>2</sup>-deg). The flight-path angle at burnout never exceeded  $30^\circ$ , and

the maximum dynamic pressure was less than  $24\text{K N/m}^2$  ( $500\text{ lb/ft}^2$ ; trajectory details for burnout at  $76.2\text{ km}$  are presented in figure 10. The landing weight of  $65.8\text{K kg}$  ( $145\text{K lb}$ ) was approximately the same as for the two-SSME, internal-tank version (figure 1(a)). With the third SSME installed, the center-of-gravity location of  $0.67\%$  was the same as for the baseline orbiter.

In considering the use of a smaller external tank (in lieu of an off-loaded baseline tank), the cost advantage resulting from easier recovery, inspection, and reuse for the tank must be balanced against the requirement for separate design, construction, and man-rating. Obviously, a trade study would be required prior to making a decision on tank size.

### Air Launched

The performance capability of the air-launched orbiter retrofitted with a single J-2 rocket engine and propellant tanks within the payload bay (figure 11) is summarized in figure 12 and Table II with the trajectory details presented in figures 13 to 15. This mode of operation was believed to be the prime candidate for an early, supersonic flight-test program using the production orbiter. Air launch and rocket-engine ignition was assumed at an altitude of  $9145\text{ km}$  ( $30\text{K ft}$ ), a velocity of  $122\text{ m/sec}$  ( $400\text{ ft/sec}$ ), and a flight path angle of  $0^\circ$ . Using POST, trajectories were calculated using  $22.7\text{K}$ ,  $45.4\text{K}$ , and  $68.0\text{K kg}$  ( $50\text{K}$ ,  $100\text{K}$ , and  $150\text{K lb}$ ) of propellant with burnout altitudes of  $22.9$ ,  $30.5$ , and  $38.1\text{ km}$  ( $75\text{K}$ ,  $100\text{K}$ , and  $125\text{K ft}$ ), respectively. Relative velocities at burnout of about  $610$ ,  $1220$ , and  $1650\text{ m/sec}$  ( $1950$ ,  $3950$ , and  $5360\text{ ft/sec}$ ) were obtained for the three propellant loadings. The maximum dynamic pressure was  $12,690\text{ N/m}^2$  ( $265\text{ lb/ft}^2$ ), and maximum  $q\alpha$  was about  $124,500\text{ N/m}^2\text{-deg}$  ( $2600\text{ lb/ft}^2\text{-deg}$ ). The maximum flight path angle decreased as the propellant loading increased and never exceeded  $57^\circ$  with a maximum value at burnout of  $-8^\circ$ . Using one J-2, the accelerations were  $< 2\text{ g's}$ . If two J-2s were used, the increase in T/W would reduce the drag and gravity losses which constituted a significant portion of the ideal velocity increment (figure 12). A higher burnout velocity would probably be obtained at the same burnout altitude; however, the maximum acceleration of three g's would be exceeded unless thrust modulation was utilized.

The same limitations and concerns expressed previously with regard to the start, operation, and shutdown of the J-2 apply to the air-launched version; the starting and shutdown loads must be taken by the orbiter structure and would be less than for sea-level starts because of reduced back pressure.

### FLIGHT-TEST RANGE CONSIDERATIONS

A preliminary analysis of the use of the Flight Research Center test range was conducted. For the vertical takeoff case, a launch complex was assumed at Rogers Lake; and, because of potentially high flight velocities and long distances, flights up the test range toward Bonneville were

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR.



assumed. An indication of the extent of the focused sonic-boom footprint during the pitchover maneuver following VTO is presented in figure 16 for the J-2 ascent. Overpressures (excluding plume effects) in excess of  $100 \text{ N/m}^2$  ( $2.1 \text{ lb/ft}^2$ ) occur about 55 km (30 miles) downrange, and care would have to be exercised to avoid the populated areas by use of trajectory and/or azimuth adjustments.

Because of the operational complexity and installation cost and time to provide facilities, the vertical takeoff concept may be impractical for shuttle development. The air-launched concept requires a "mother" aircraft; prior programs at FRC have demonstrated the versatility of this approach in utilizing the test range for both nominal and aborted missions. Launch location and altitude can be selected dependent upon mission requirements (range, abort landing site locations, etc.). Gradual maximum performance buildup is possible with this approach, and higher relative velocities are reached for a given propellant weight; also, the focused sonic boom issue is avoided since no pitchover is required. This mode is preferred over the vertical takeoff.

#### ISSUES IDENTIFIED

Several issues have been identified that were beyond the scope of this study but warrant attention in a detailed feasibility evaluation. Because internal tanks in the payload bay contain large amounts of cryogenic propellant well in excess of the maximum payload weight for which the orbiter was designed, a complete structural analysis would have to be made. For the air-launch mode, normal accelerations during pitchup following engine ignition result in load distributions and moments in the orbiter structure unlike the baseline shuttle ascent. The safety aspects of internally-located cryogenic propellants would have to be carefully considered, also.

The mounting and installation of J-2 engines upon a thrust structure designed for SSMEs requires modification. Because the length of the J-2 is less than the SSME, extensions are envisioned for J-2 installation to retain the nozzle exit planes in locations similar to that for the SSMEs. For SSME operation with internal propellant, raising the SSMEs to clear the body flap appears desirable, dependent upon gimbal requirements.

The starting and operational capability of the liquid rockets (J-2 and SSME) in these off-design conditions must be considered for the installations envisioned. Of particular significance are the J-2 low-altitude starting and shutdown transient loads resulting from asymmetric flow separation within the J-2 nozzles.

Ascent flight-control requirements and the magnitude of thrust vectoring would have to be determined. The use of aerodynamic control during ascent should be considered to alleviate the thrust vector requirements.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

## CONCLUDING REMARKS

A study has been completed that identifies the potential performance capability of the production shuttle orbiter for powered flight tests using several propulsion systems following vertical takeoff and using J-2 rocket engines following air launch. Of the approaches considered, it was concluded that the air-launched orbiter equipped with J-2 rocket engines has the highest potential to provide a capability of early shuttle development flight tests. A potential of Mach 4 using 45.4K kg (100K lb) of internal propellant was shown. Several issues were identified that require resolution to prove feasibility.

## REFERENCE

1. Cornick, Douglas E.; Stevenson, Robert; Brauer, Garry L.; and Steinhoff, R. Terry: POST - Program to Optimize Shuttle Trajectories. NASA CR-125584, 1971.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR.

TABLE I  
WEIGHT SUMMARY  
(a) S.I. Units (kg)

SYSTEM	V.T.O.					AIR LAUNCHED, 3 J-2's			
	R.I. ORBITER	3 J-2's	2 SSME's	3 SSME's	22.7K kg	PROP	45.4K kg	PROP	68.0K kg
WING	5084	5084	5084	5084	5084	5084	5084	5084	5084
TAIL	1210	1210	1210	1210	1210	1210	1210	1210	1210
BODY	16125	16397	16125	16125	16398	16398	16398	16397	16397
INDUCED ENVIR PROT	11414	11414	11414	11414	11414	11414	11414	11414	11414
L.D. LOCK, REC.	4310	4310	4310	4310	4310	4310	4310	4310	4310
PROP ASCENT	11994	9755	10943	11994	7370**	8147**	8147**	8963**	8963**
PROP AUXILIARY	2369	1689	1689	1689	1689	1689	1689	1689	1689
PRIME POWER	1540	877	877	877	877	877	877	877	877
ELECT CONVER & DISTR	2840	2433	2433	2433	2433	2433	2433	2433	2433
HEAT CONVER & DISTR	833	833	847	847	833	833	833	833	833
SURFACE CONTROLS	2531	1369	1369	1369	1369	1369	1369	1369	1369
AVIONICS	1240	1134	131	1134	1134	1134	1134	1134	1134
ENVIR CONTROL	612	612	612	612	612	612	612	612	612
PERSONNEL PROV.	22	0	0	0	0	0	0	0	0
PAYLOAD ACCOM.	5596	5221	5172	4875	4988	5059	5059	5142	5142
MARGIN	68040	62338	63219	63973	59715	60569	60569	61467	61467
PERSONNEL	553	553	553	553	553	553	553	553	553
ACPS RESERVES	91	91	91	91	91	91	91	91	91
RESIDUALS	2280	2280	134	1179	2280	2280	2280	2280	2280
LANDING WEIGHT	70217	65262	64997	65796	62639	63493	63493	64391	64391
ACPS PROP (ENTRY)	1270	1635	1635	1635	1635	1635	1635	1635	1635
ENTRY WEIGHT	71487	66897	66632	67431	64274	65128	65128	66026	66026
INFLIGHT LOSSES	454	454	454	680	116	231	231	340	340
ASCENT PROP	8892	8892	93634	333273*	22680	45360	45360	68040	68040
GROSS WEIGHT	156243	156243	160720	401384	87070	110719	110719	134406	134406

\* Includes Weight of External Tank 17730 kg.

\*\* Includes Weight of 3 J-2's or 1 J-2 + 3133 kg Ballast.

TABLE I  
WEIGHT SUMMARY  
(b) U.S. Customary Units (lb)

SYSTEM	R.I. 150K ORBITER	V.M.O.			50K LL. PROF.	100K LL. PROF.	150K LL. PROF.
		3 J-2's	2 SCL's	1 HELI'S			
WING	11200	11200	11200	11200	11200	11200	11200
TAIL	2669	2669	2669	2669	2669	2669	2669
BODY	3534	3534	3534	3534	3534	3534	3534
INDUCED ENVIR PROF	25164	25164	25164	25164	25164	25164	25164
LND, DOCK, REC.	2501	9501	9501	9501	9501	9501	9501
PROP ASCENT	26441	21505	24125	24125	24125	24125	24125
PROP AUXILIARY	7223	3723	3723	3723	3723	3723	3723
PRIME POWER	3395	1934	1934	1934	1934	1934	1934
ELECT CONVR & DISTR	5260	5364	5364	5364	5364	5364	5364
HYDR CONVR & DISTR	137	137	137	137	137	137	137
SURFACE CONTROLS	4222	4222	4222	4222	4222	4222	4222
AVIONICS	4275	2513	2513	2513	2513	2513	2513
ENVIR CONTROL	1350	1350	1350	1350	1350	1350	1350
PERSONNEL PROF.	47	0	0	0	0	0	0
PAYLOAD ACCOM.	2551	11597	11597	11597	11597	11597	11597
MARGIN							
DRY WEIGHT	150000	137429	139371	141034	131646	133530	135510
PERSONNEL		1220	1220	1220	1220	1220	1220
ACFS RESERVES		200	200	200	200	200	200
RESIDUALS		5026	5026	5026	5026	5026	5026
LANDING WEIGHT	154800	143875	143201	145054	138092	139976	141956
ACFS PROP (ENTRY)	2800	3605	3605	3605	3605	3605	3605
ENTRY WEIGHT	157600	147480	146896	148659	141697	143581	145561
INFLIGHT LOSSES		1000	1000	1000	1000	1000	1000
ASCENT PROF		195470	206424	73472 *	335	335	335
GROSS WEIGHT		344450	354320	884887	191952	244091	296311

\* Includes Weight of External Tank 39088 lb

\*\* Includes Weight of 3 J-2's or 1 J-2 + 6908 lb Ballast.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

TABLE II

BURNOUT CONDITIONS FOLLOWING AIR LAUNCH  
ONE J-2 ROCKET, INTERNAL TANKS

PROPELLANT WEIGHT	BURNOUT CONDITIONS		FLIGHT-PATH ANGLE, DEG.
	ALTITUDE	RELATIVE VELOCITY	
22.68K kg 50K lb	22.9 km 75K ft	594 m/sec 1948 ft/sec	-0.2
45.36K kg 100K lb	30.5 km 100K ft	1240 m/sec 3952 ft/sec	-8.3
68.04K kg 150K lb	38.1 km 125K ft	1635 m/sec 5363 ft/sec	-7.2

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR.

	R.I. Orbiter	1205 SRM External	1205 SRM Internal	3 J-2's Internal Tanks	2 SSME's Internal Tanks	3 SSME's External Tanks
GLOW, kg		287.5K	287.9K	156.2K	160.7K	401.4K
GLOW, lbs.		633.8K	634.6K	344.5K	354.3K	884.9K
Entry wt., kg	71.5K	56.1K	89.3K	66.9K	66.6K	67.4K
Entry wt., lbs.	157.6K	123.7K	196.8K	147.5K	146.9K	148.7K
Entry c.g., x/L	0.670	0.604	0.683	0.641*	0.643*	0.667
Landing wt., kg	70.2K	54.5K	87.6K	65.3K	65.0K	65.8K
Landing wt., lbs.	154.8K	120.1K	193.2K	143.9K	143.3K	145.1K
Landing c.g., x/L	0.669	0.598	0.681	0.641*	0.639*	0.670

\*Approximately 15K lb. at rear of vehicle will shift c.g. aft about 0.03 x/L

(a) Vertical takeoff.

Figure 1.- Development flight-test vehicle weight/c.g. summary.

10/28/68

	R. I. Orbiter	50K lb Propellant	100K lb Propellant	150K lb Propellant
GLOW, kg				
GLOW, lb				
Entry wt., kg	71.5K	64.3K	65.1K	66.0K
Entry wt., lb	157.6K	141.7K	143.6K	145.4K
Entry c.g., x/l:	0.670	.64	0.64	0.64
Landing wt., kg.	70.2K	62.6K	63.5K	64.4K
Landing wt., lb	154.8K	138.1K	140.0K	142.0K
Landing c.g., x/l:	.669	0.64	0.64	0.64

(b) Airlaunched, J-2 powered.

Figure 1.- Concluded.

1.2

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR.


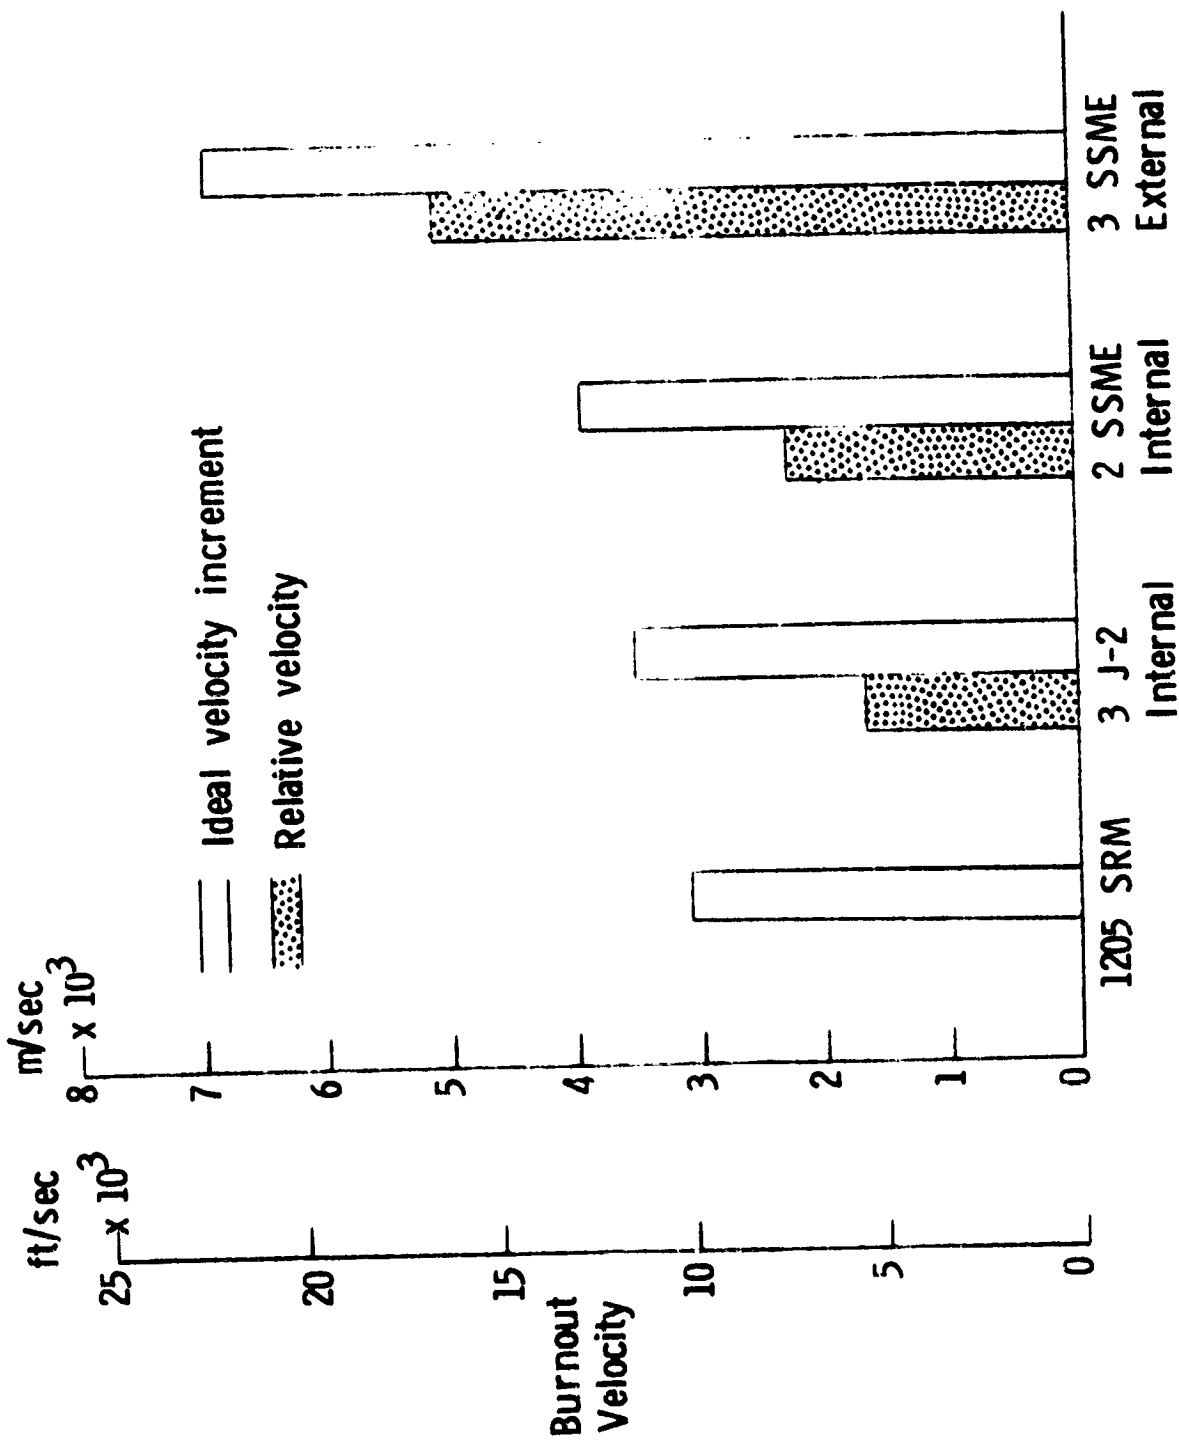


Figure 2. - Vertical takeoff performance.




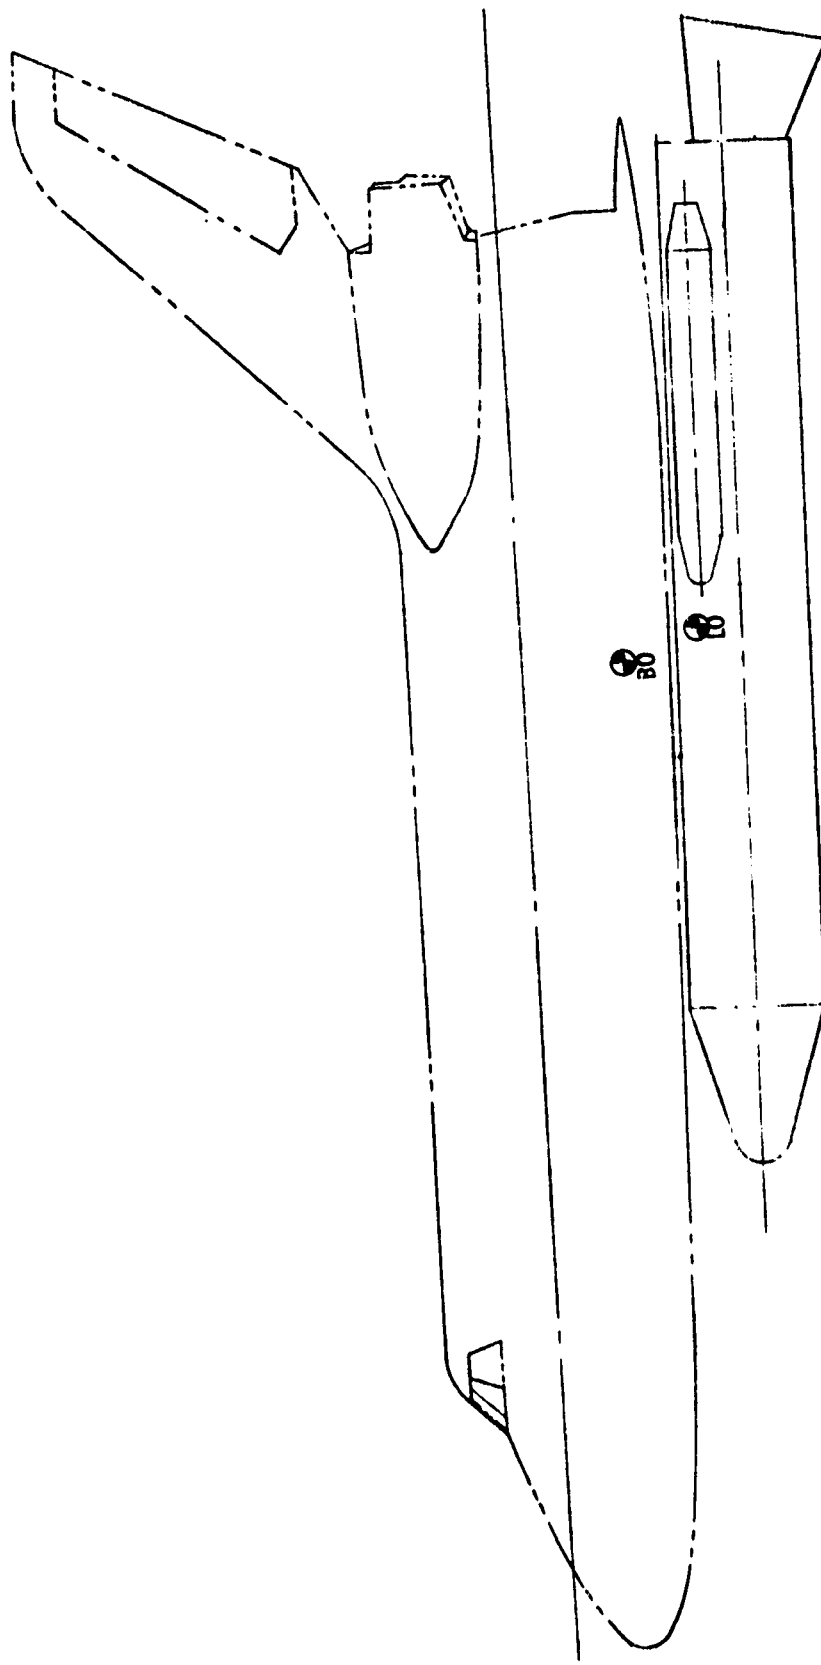

GLOW	287,474 kg	(633,760 lb)
B. O. wt.	88,876 kg	(195,935 lb)
Entry wt.	56,118 kg	(123,718 lb)

(a) Externally-mounted.

Figure 3. - Vertical takeoff, 1205 SRM powered.

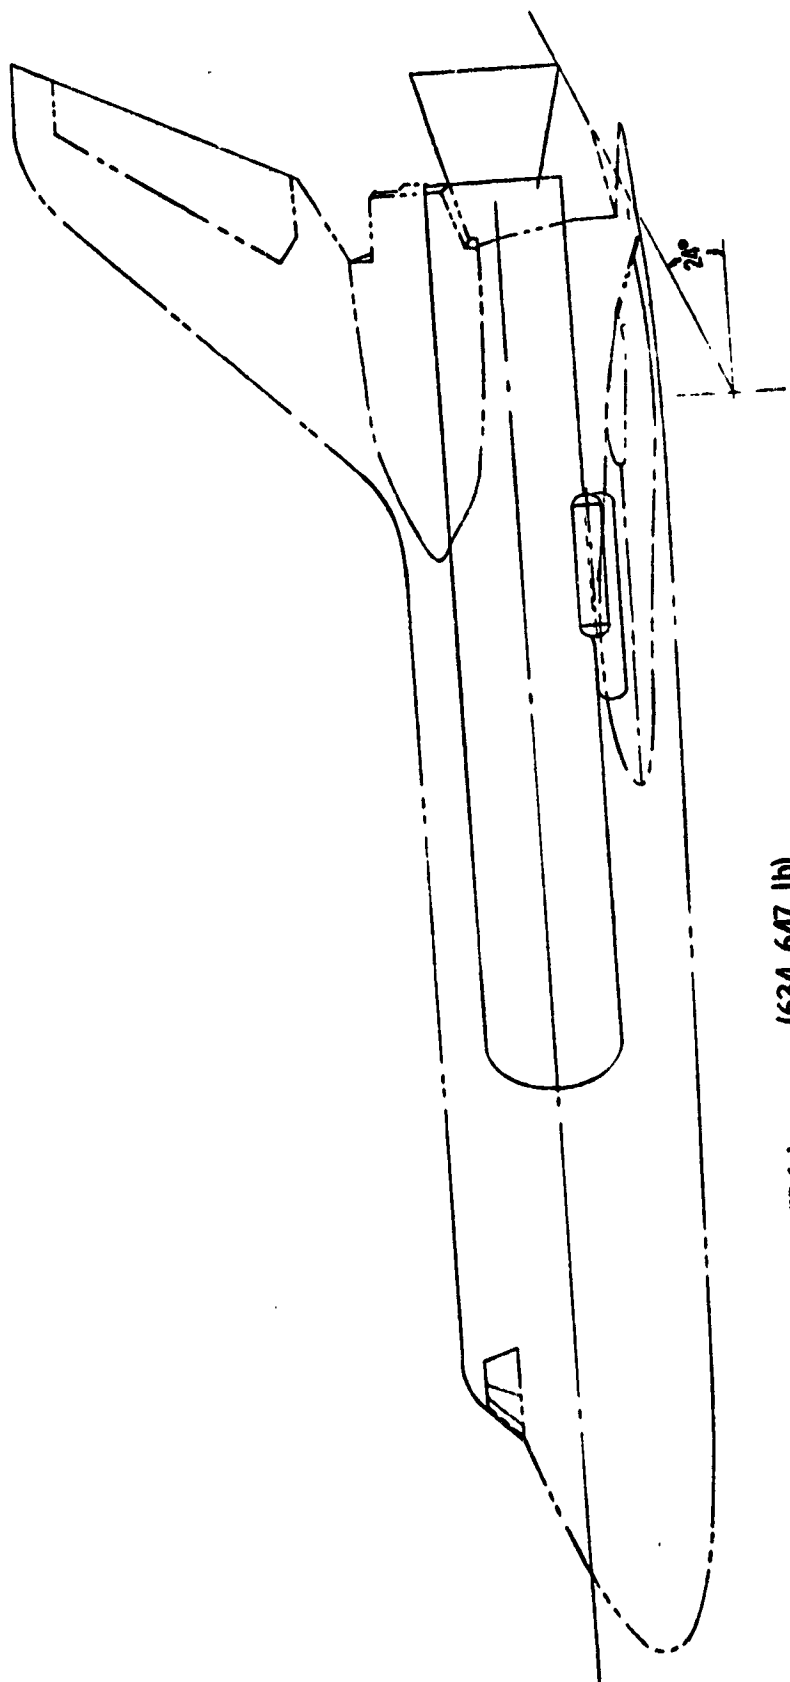

GLOW	287,376 kg	(634,647 lb)
B. O. wt.	89,278 kg	(196,822 lb)
Entry wt.	89,278 kg	(196,822 lb)

(b) Internally-mounted.

Figure 3.- Concluded.

GLOW 156,243 kg (344,450 lb)  
B. O. wt. 66,897 kg (147,480 lb)  
Entry wt. 66,897 kg (147,480 lb)

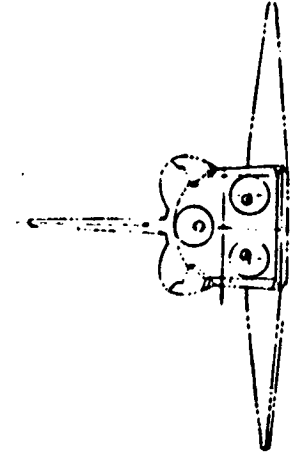
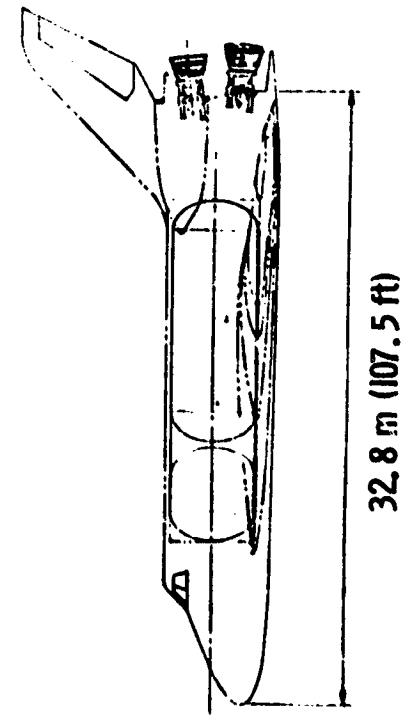
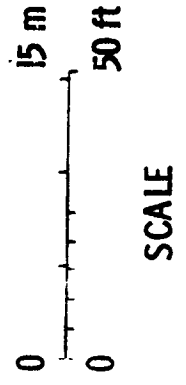
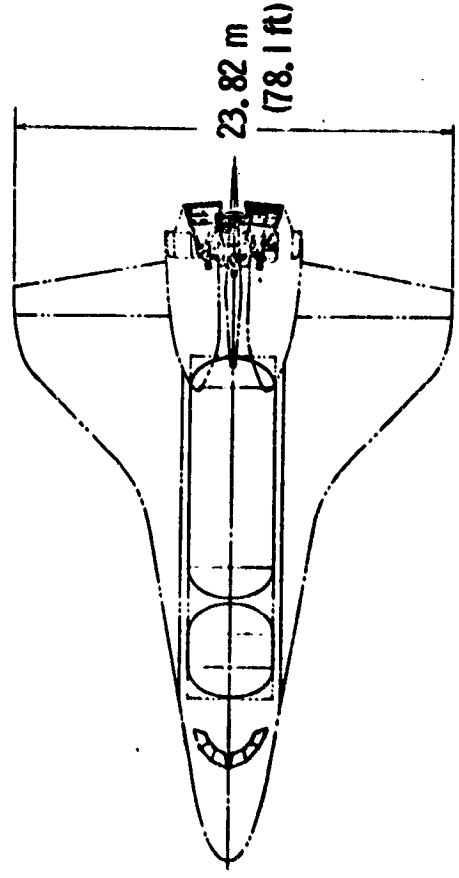


Figure 4.- Vertical takeoff, J-2 powered.



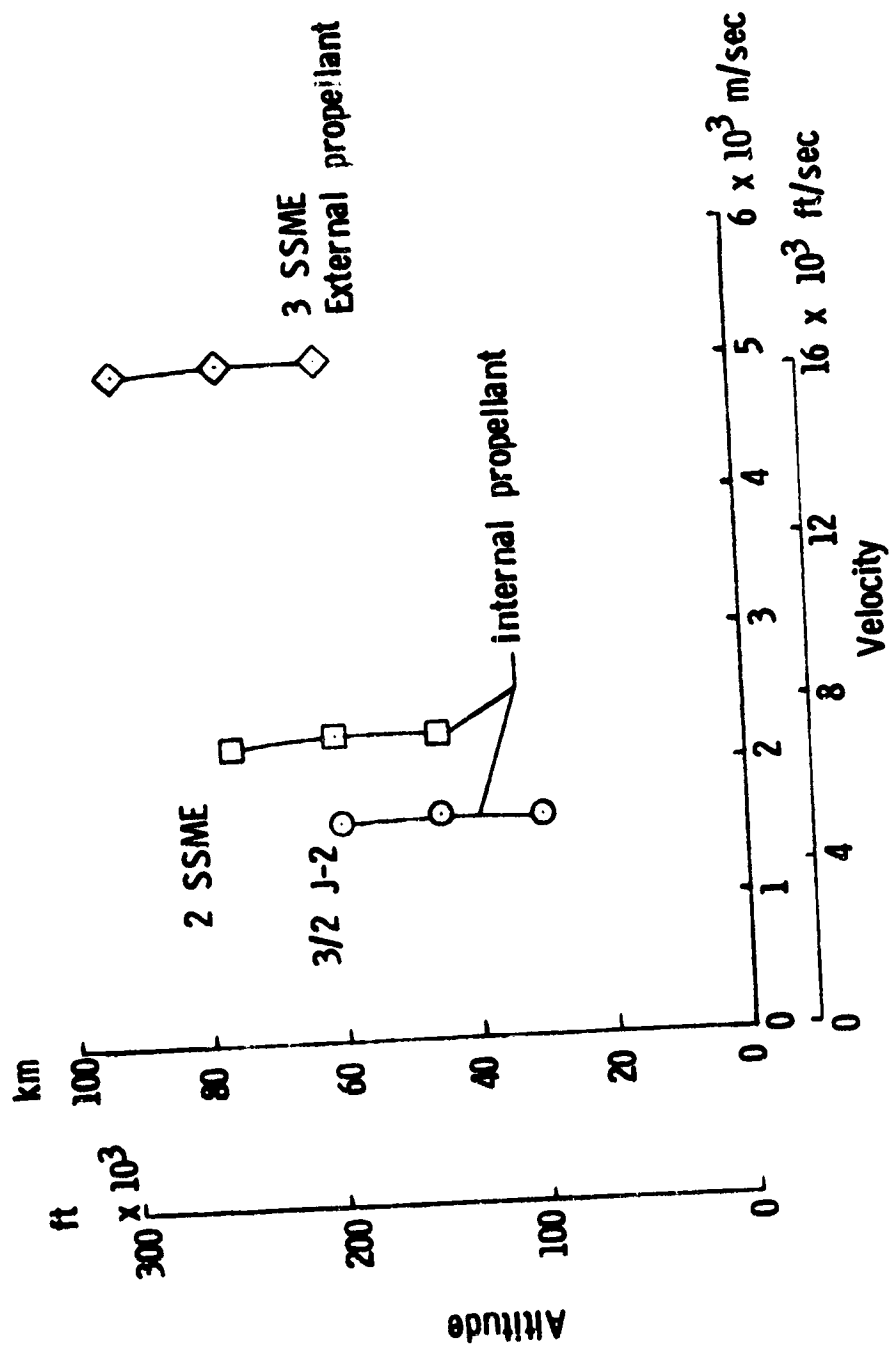


Figure 5.- Burnout conditions following vertical takeoff.

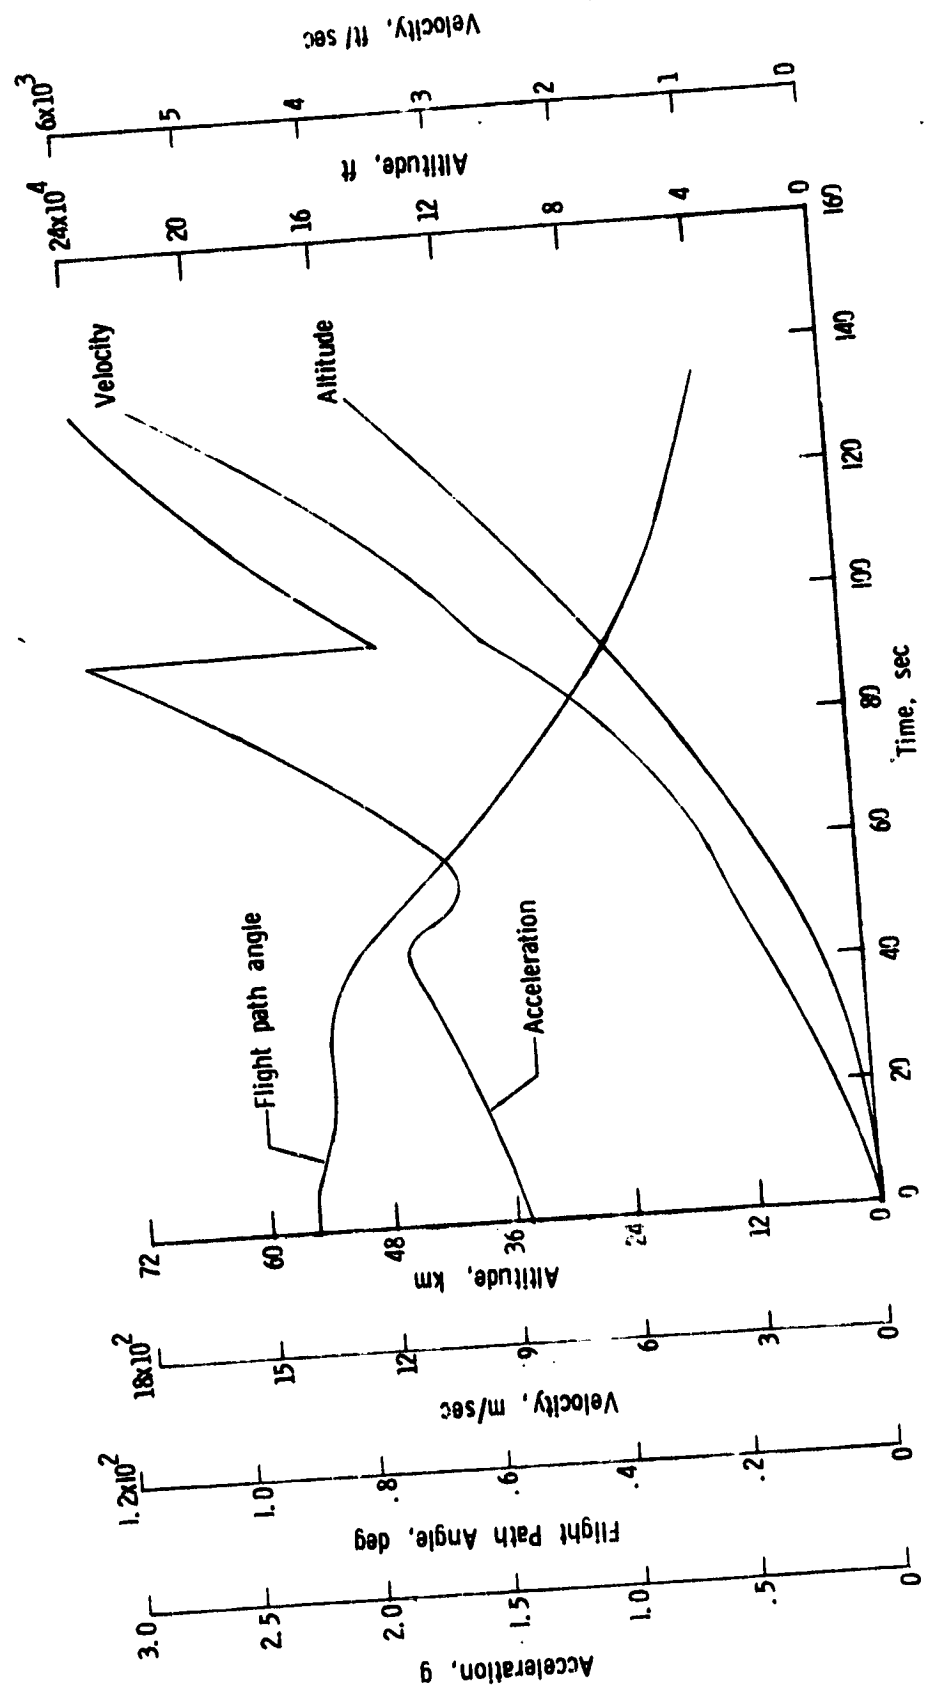

(a) Altitude, velocity, flight path angle, and total acceleration.


Figure 6.- Vertical takeoff with J2 engines.

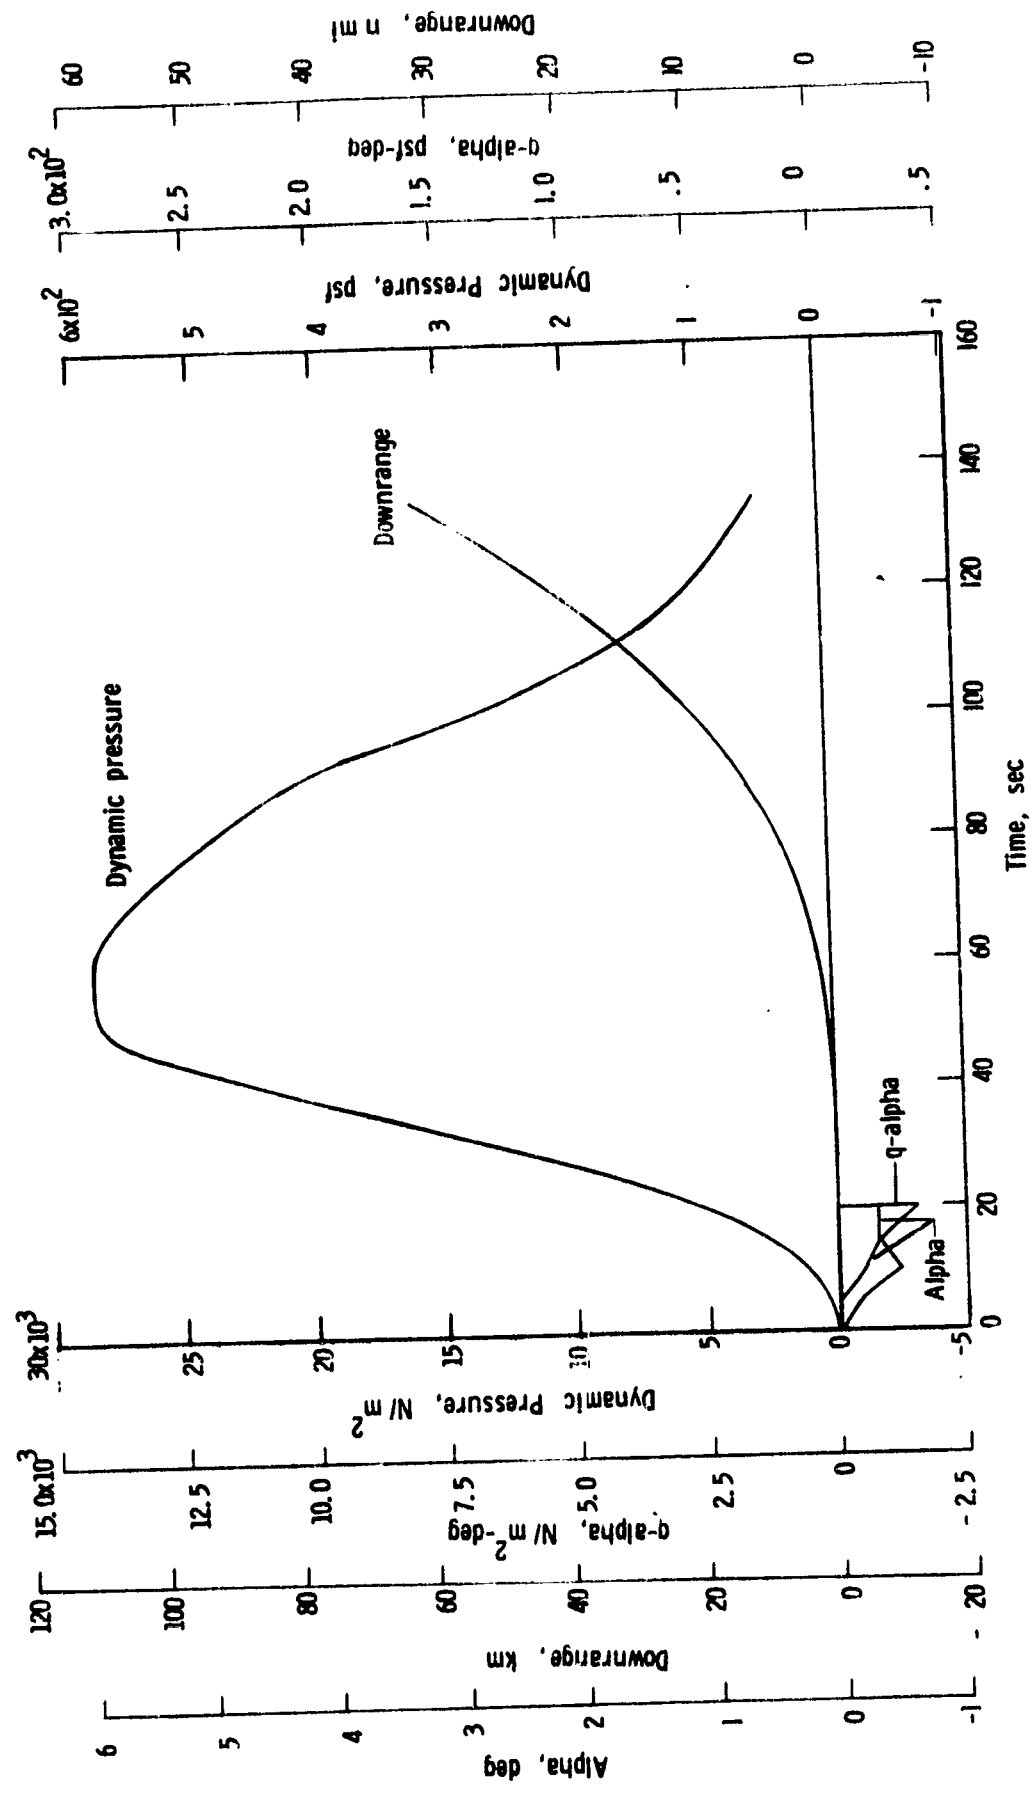

(b) Angle of attack, dynamic pressure, q-alpha, and downrange.

Figure 6.- Concluded.

GROSS wt.	160,720 kg	(354 320 lb)
B. O. wt.	66,632 kg	(146,896 lb)
ENTRY wt.	66,632 kg	(146,896 lb)

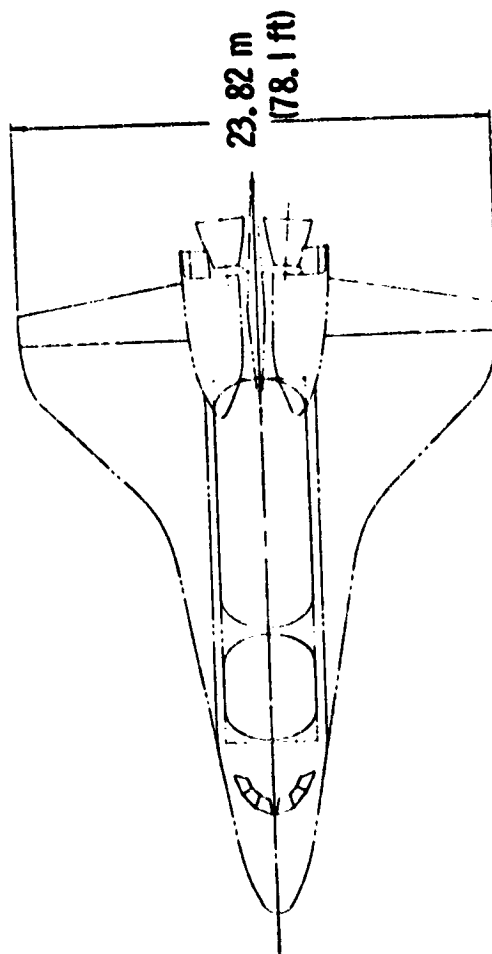

SCALE



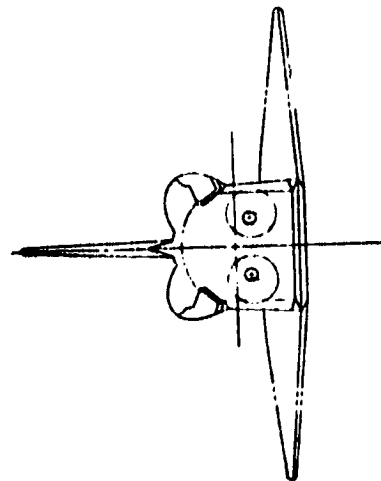



Figure 7.- Vertical takeoff, two SSME powered, internal tanks.

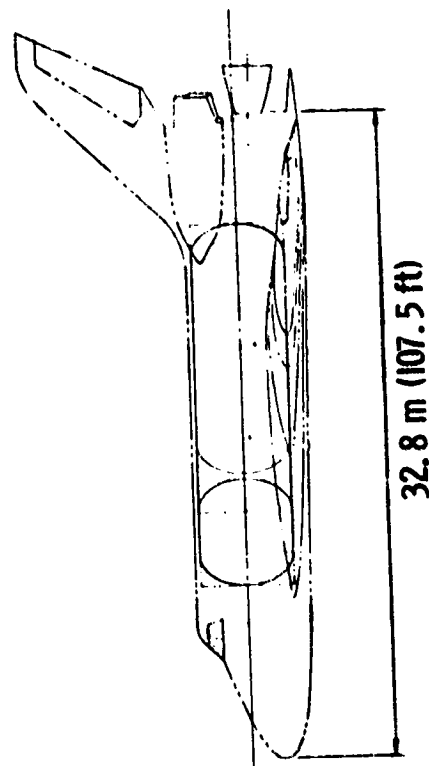

(a) Altitude, velocity, flight path angle, and total acceleration.

Figure 8.- Vertical takeoff with 2 SSME.

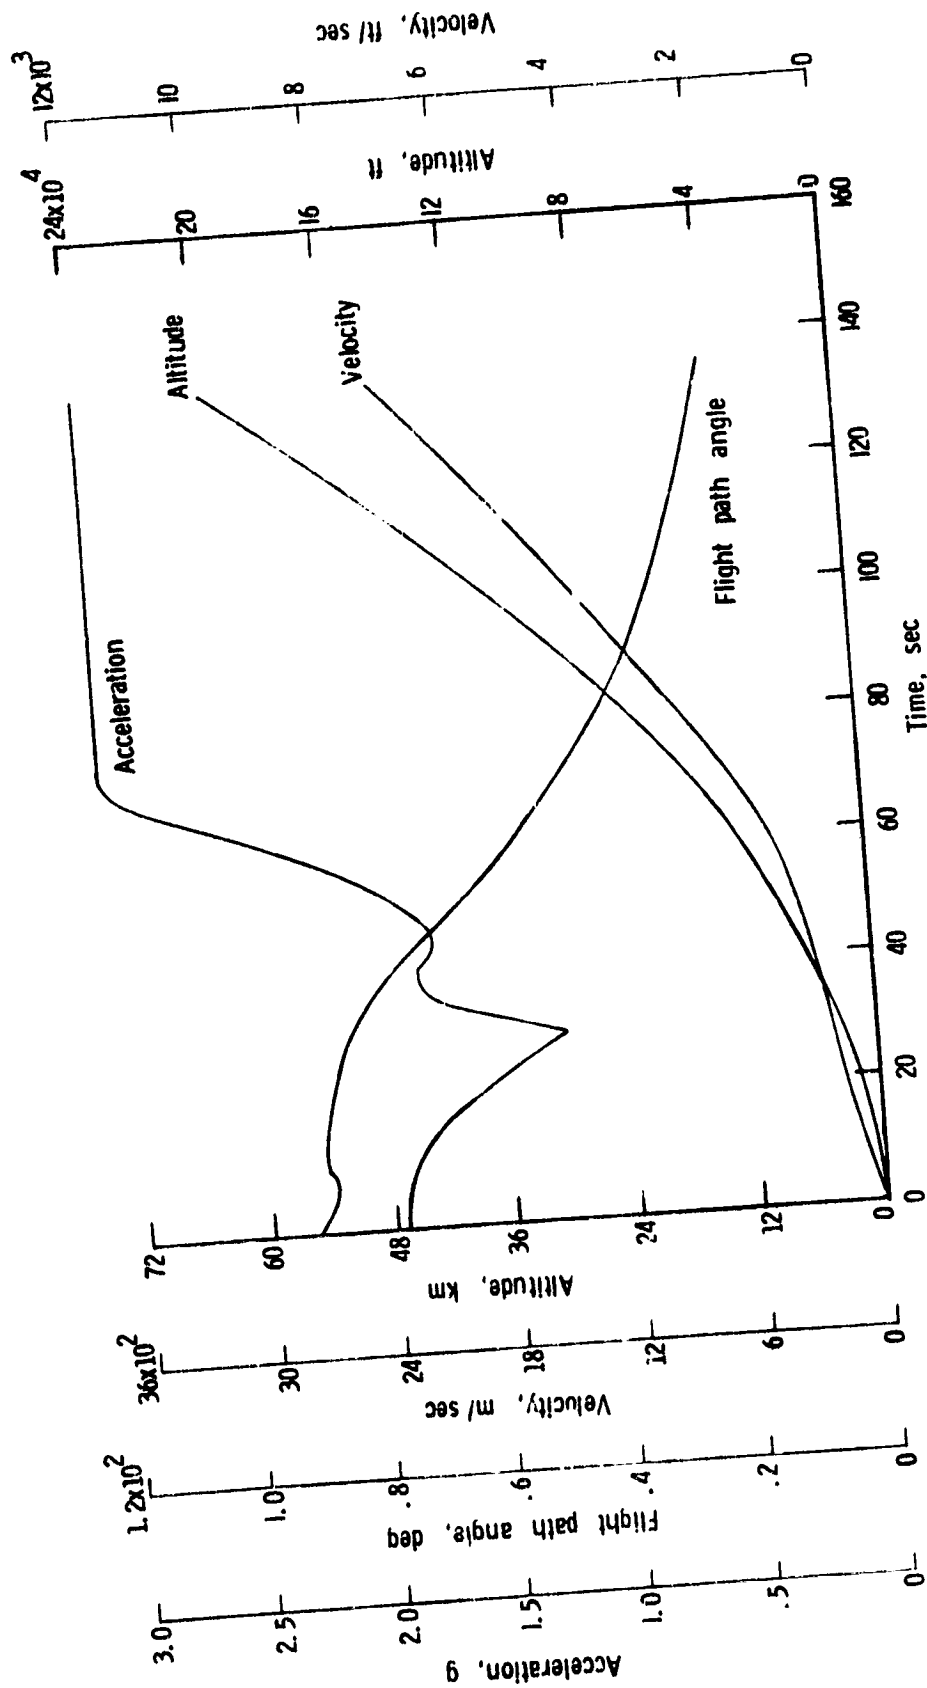

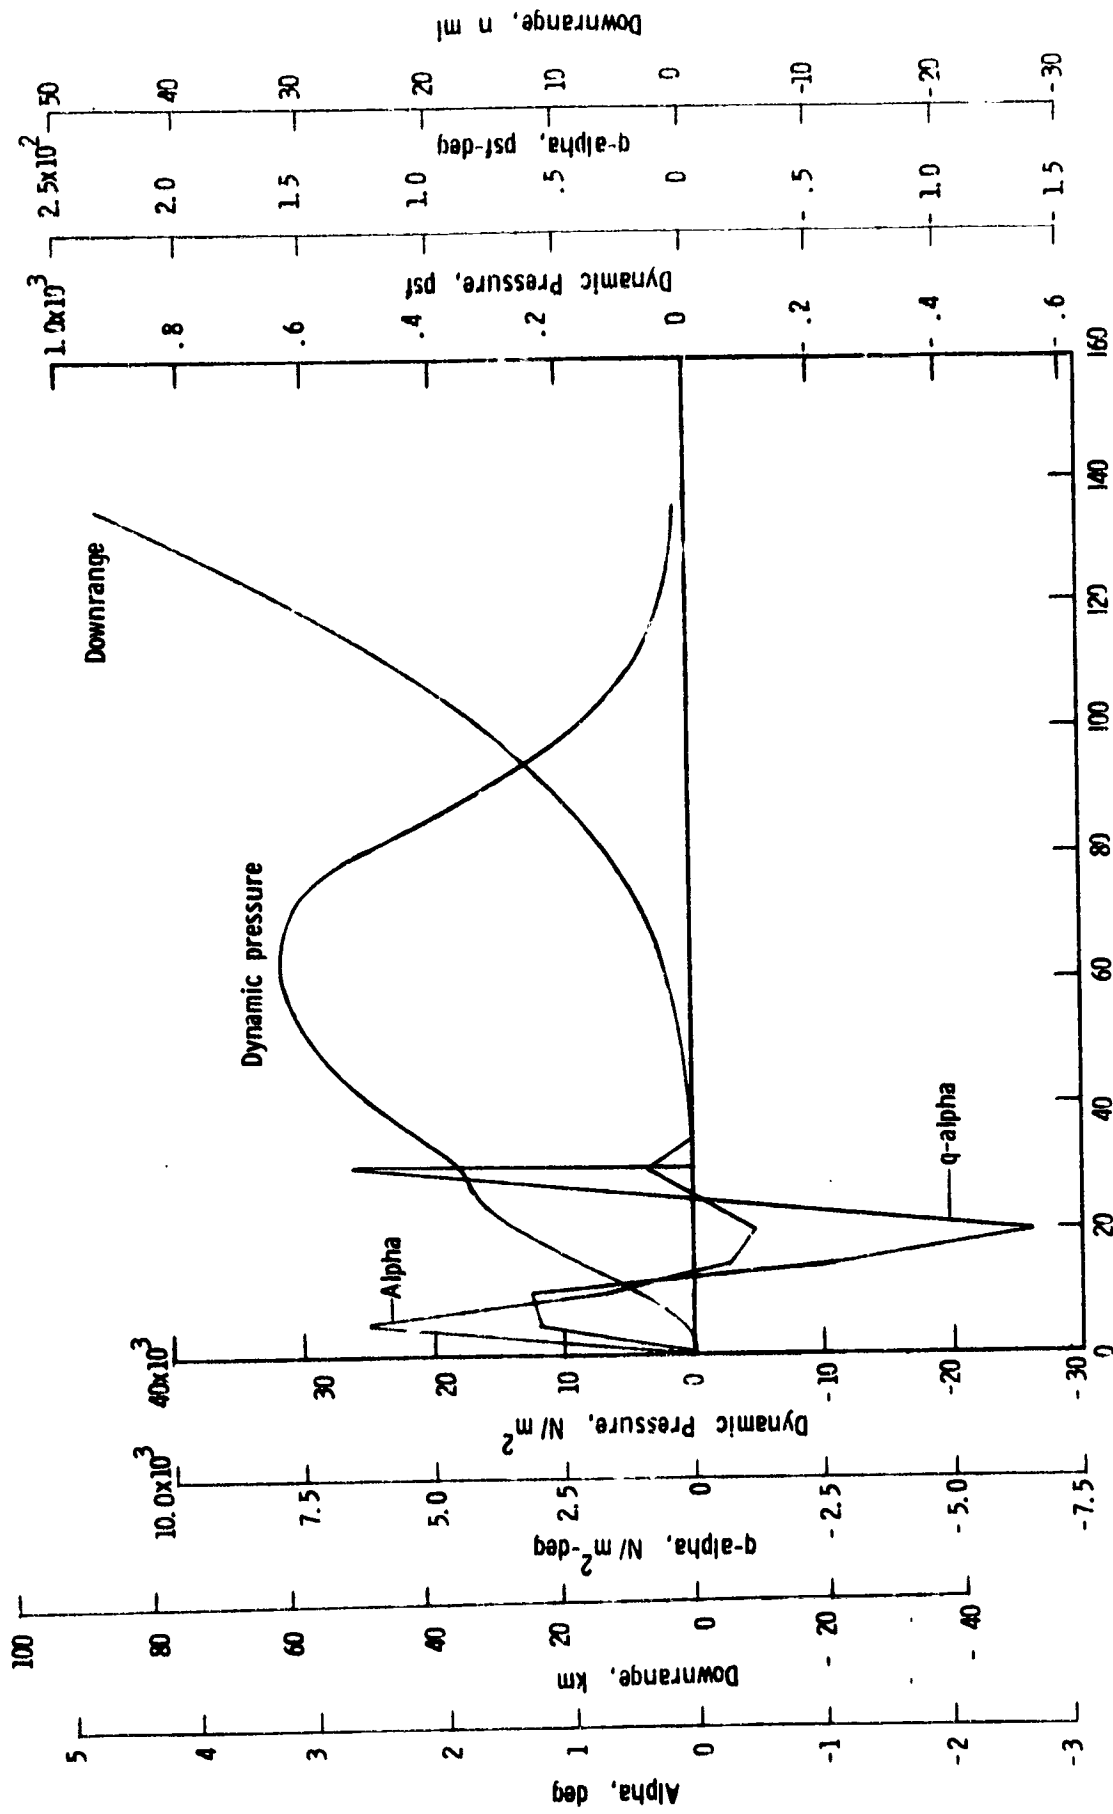

(b) Angle of attack, dynamic pressure, q-alpha, and downrange.  
Figure 8.- Concluded.

GLOW	401,385 kg	1884,887 lb)
B. O. wt.	85,162 kg	(187,747 lb)
Entry wt.	67,432 kg	(148,659 lb)






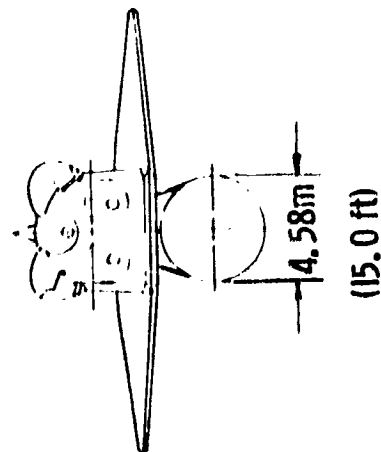


Figure 9. - Vertical takeoff, three SSME, external tank's.

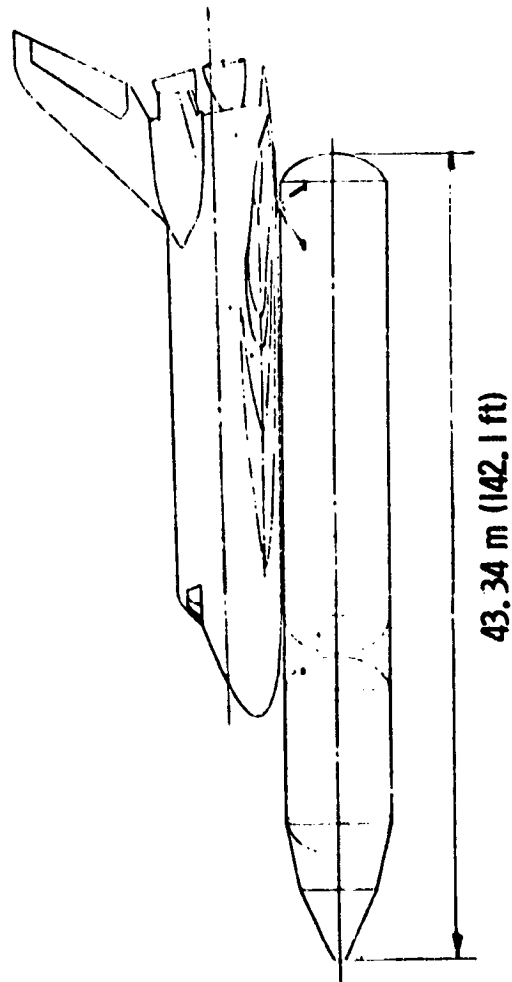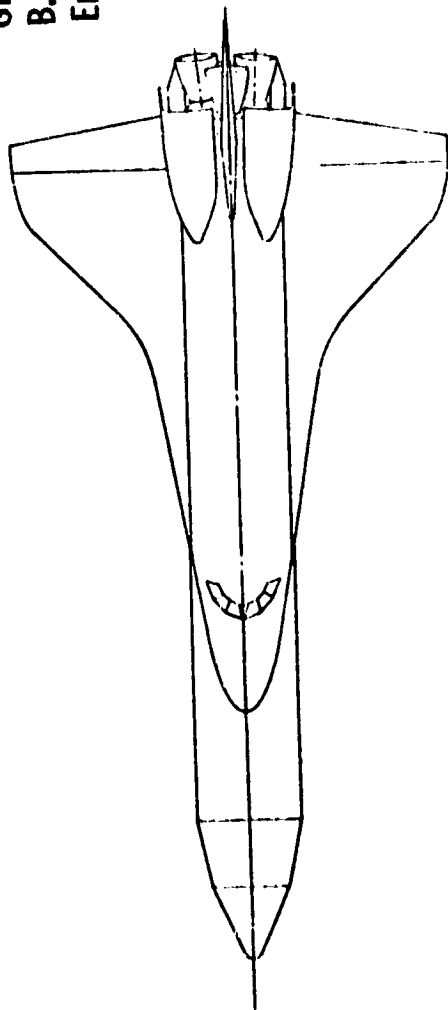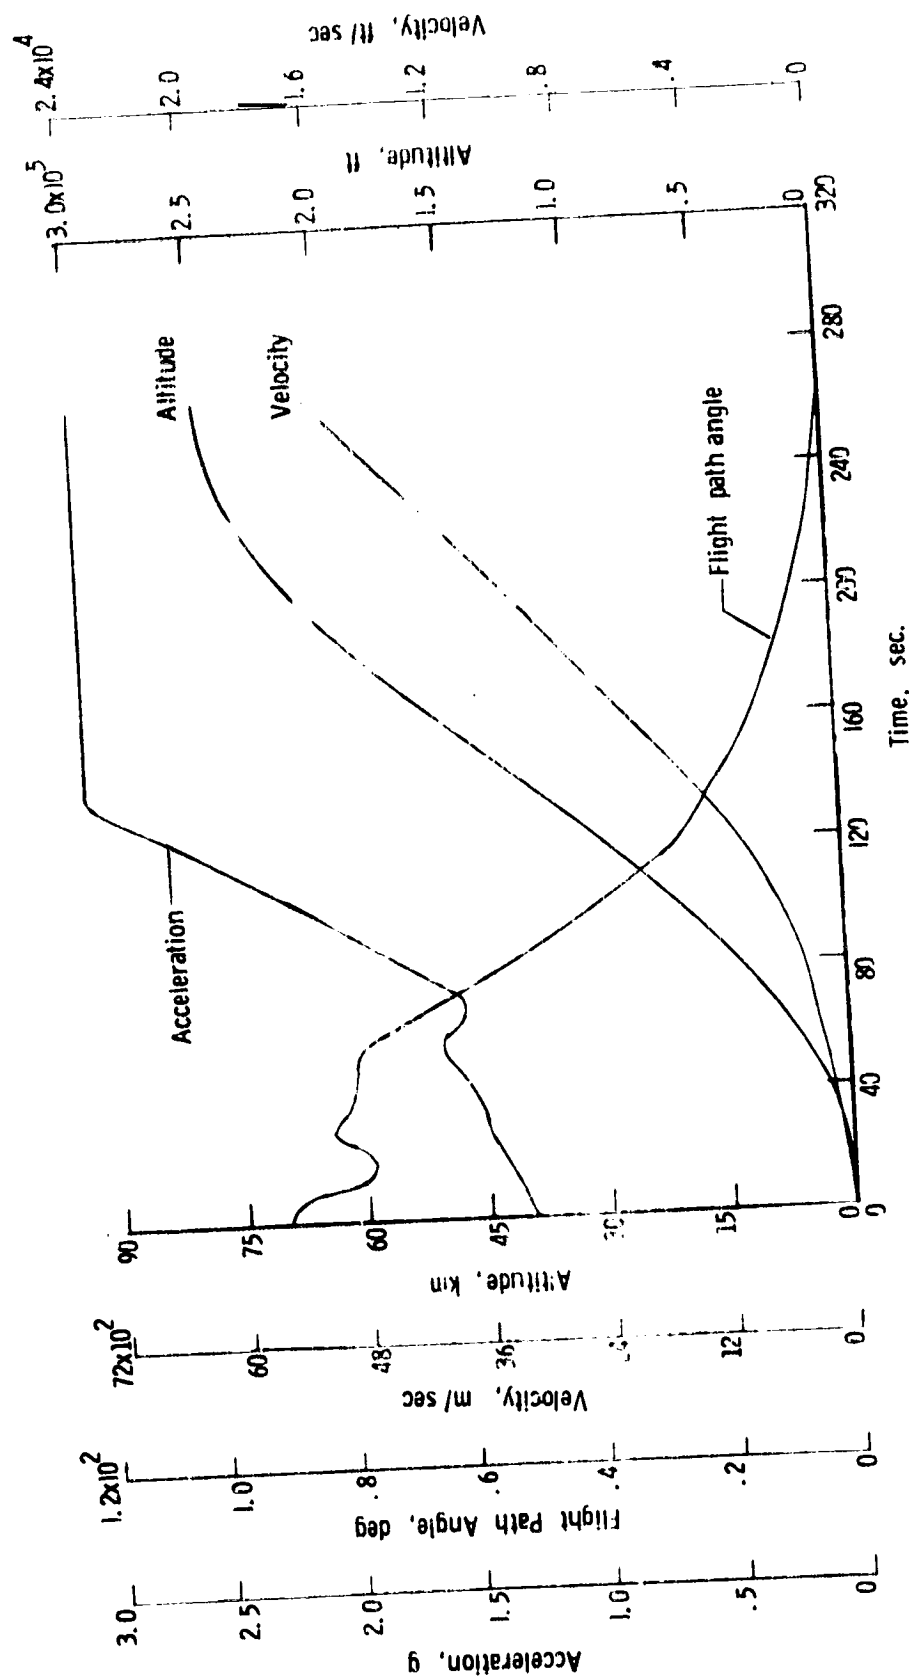

(a) Altitude, velocity, flight path angle, and total acceleration.


Figure 10.- Vertical takeoff with 3 SSME and external tanks.

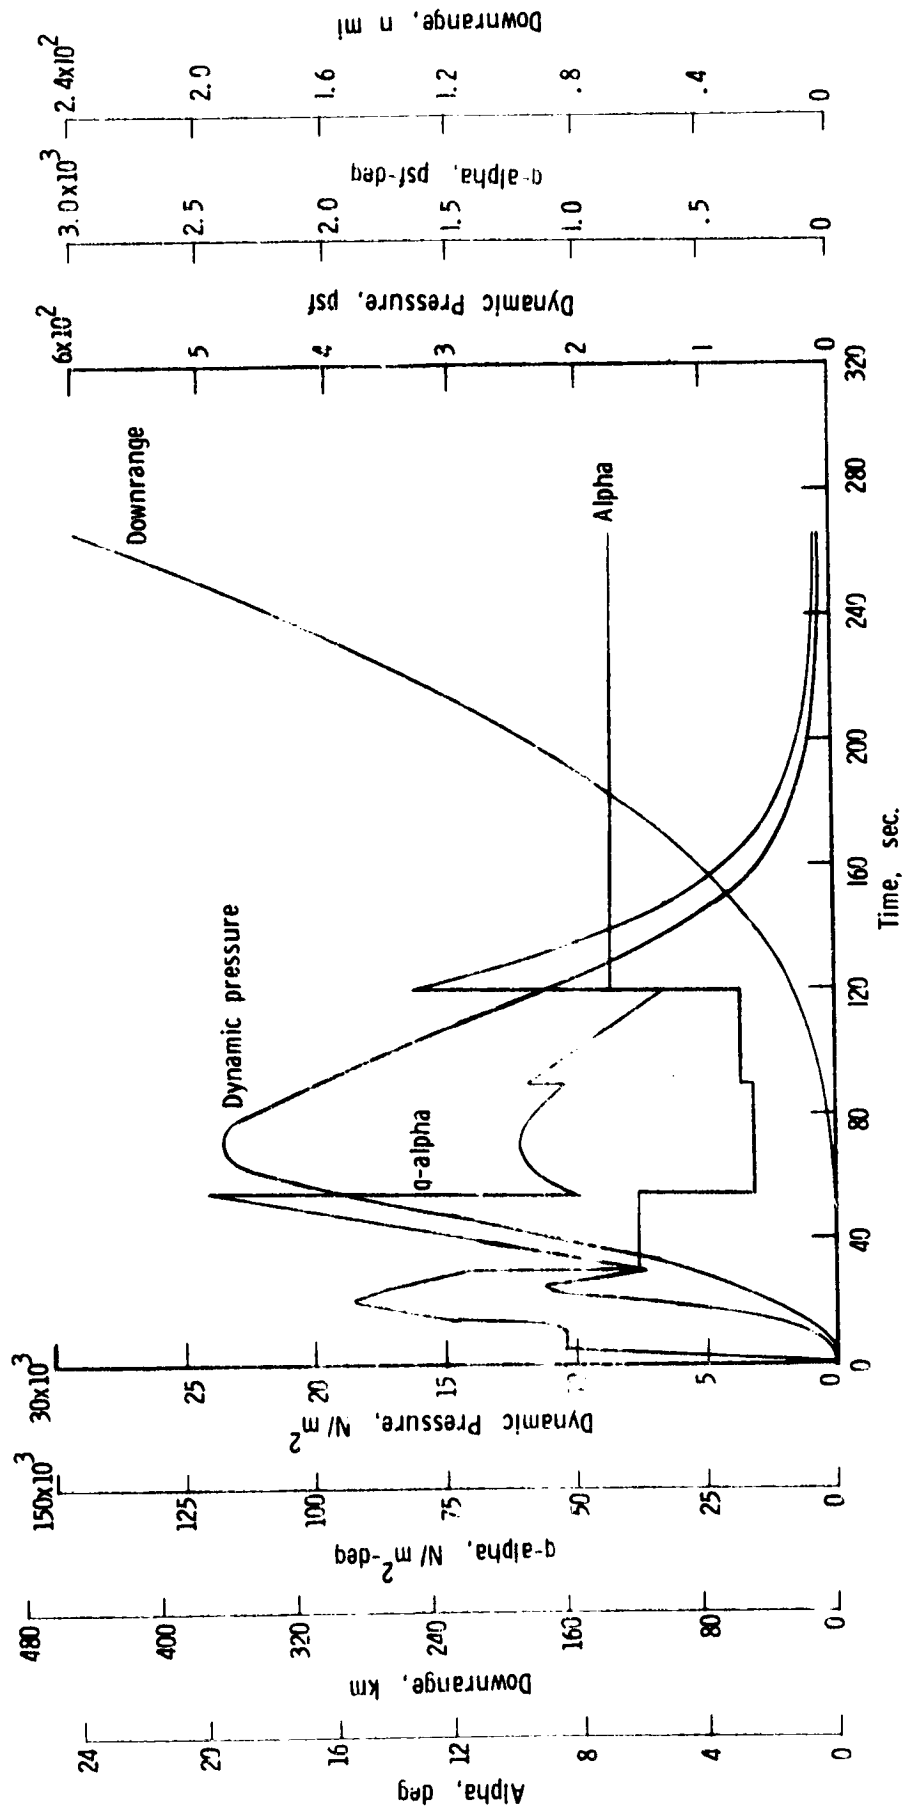

(b) Angle of attack, dynamic pressure, q-alpha, and downrange.

Figure 10. - Concluded.

GROSS wt.	110,678 kg	(244,000 lb)
B. O. wt.	65,318 kg	(144,000 lb)
PROPELLANT wt.	45,360 kg	(100,000 lb)

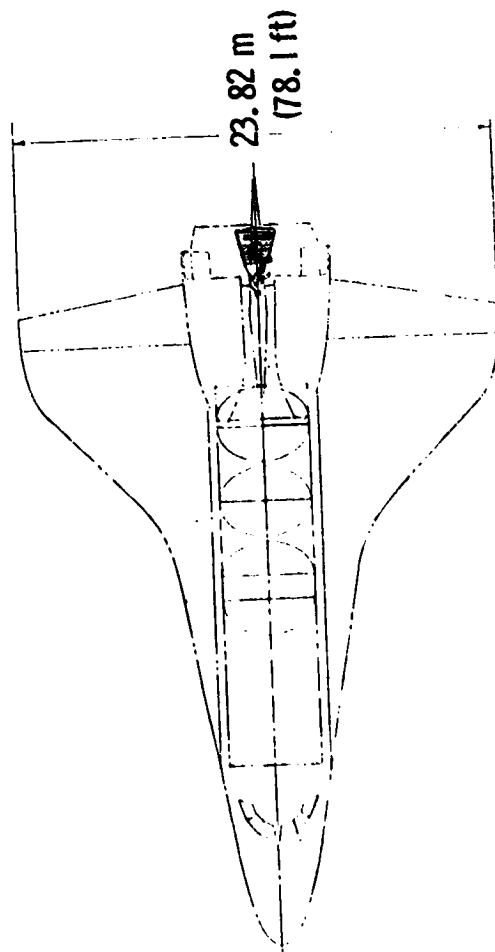

SCALE

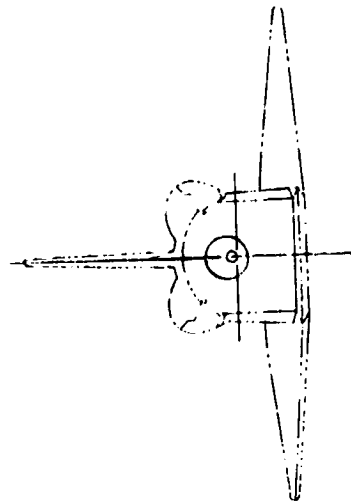
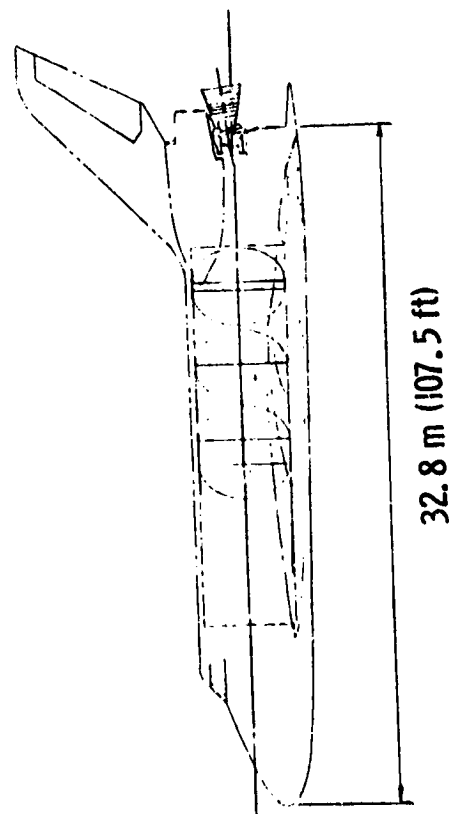


Figure 11.- Air-launched, J-2 powered.



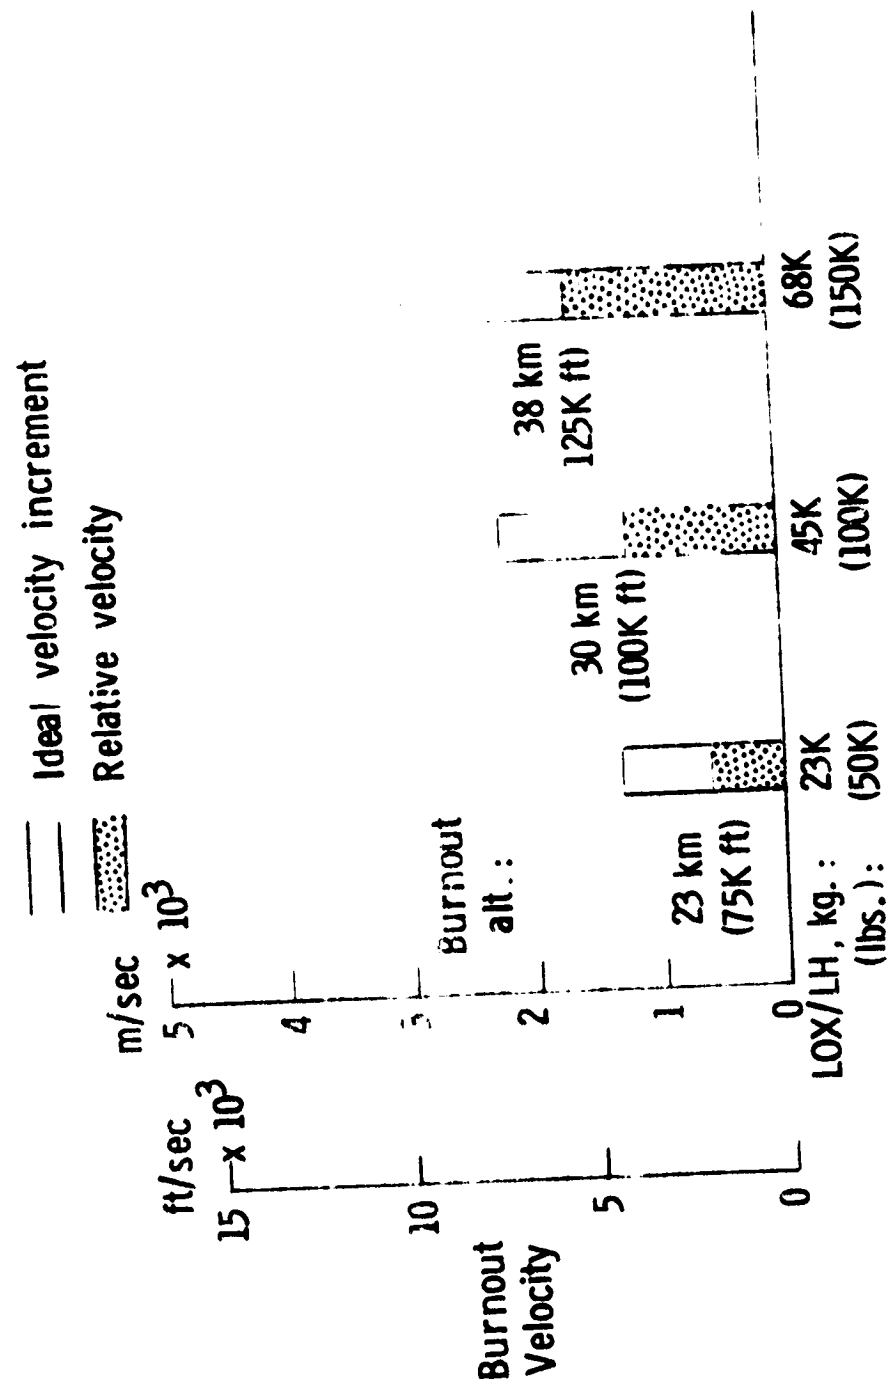


Figure 12. - Air-launched performance, one J-2 powered, internal tanks.

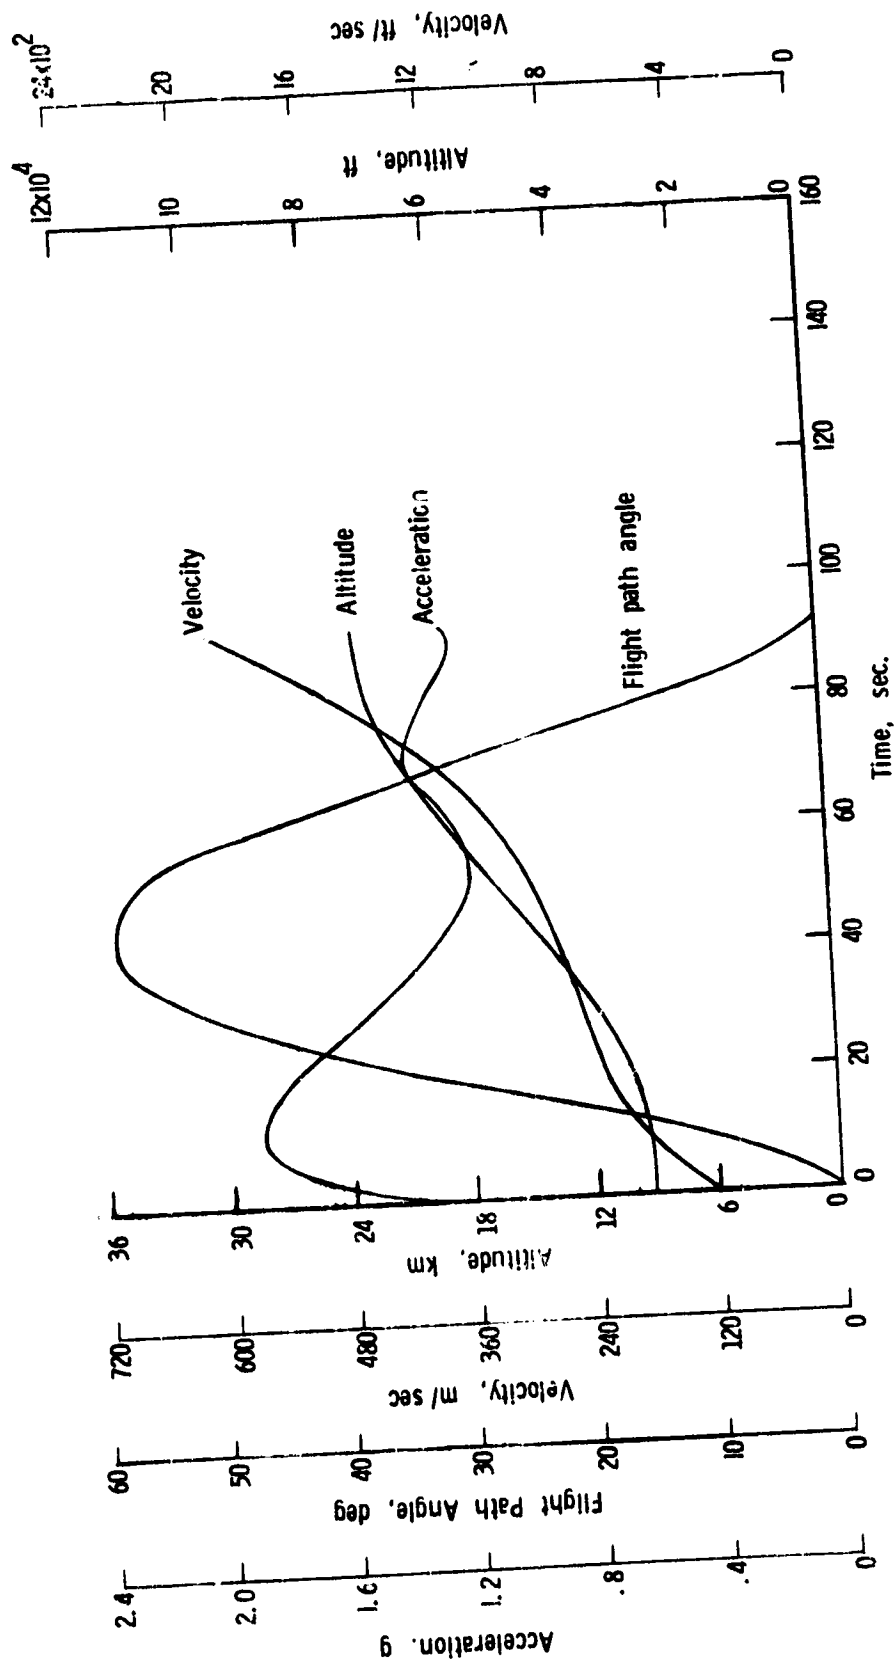

(a) Altitude, velocity, flight path angle, and total acceleration.


Figure 13.- Airlaunched with 22,680 kg (50,000 lb) of propellant, J-2 powered.

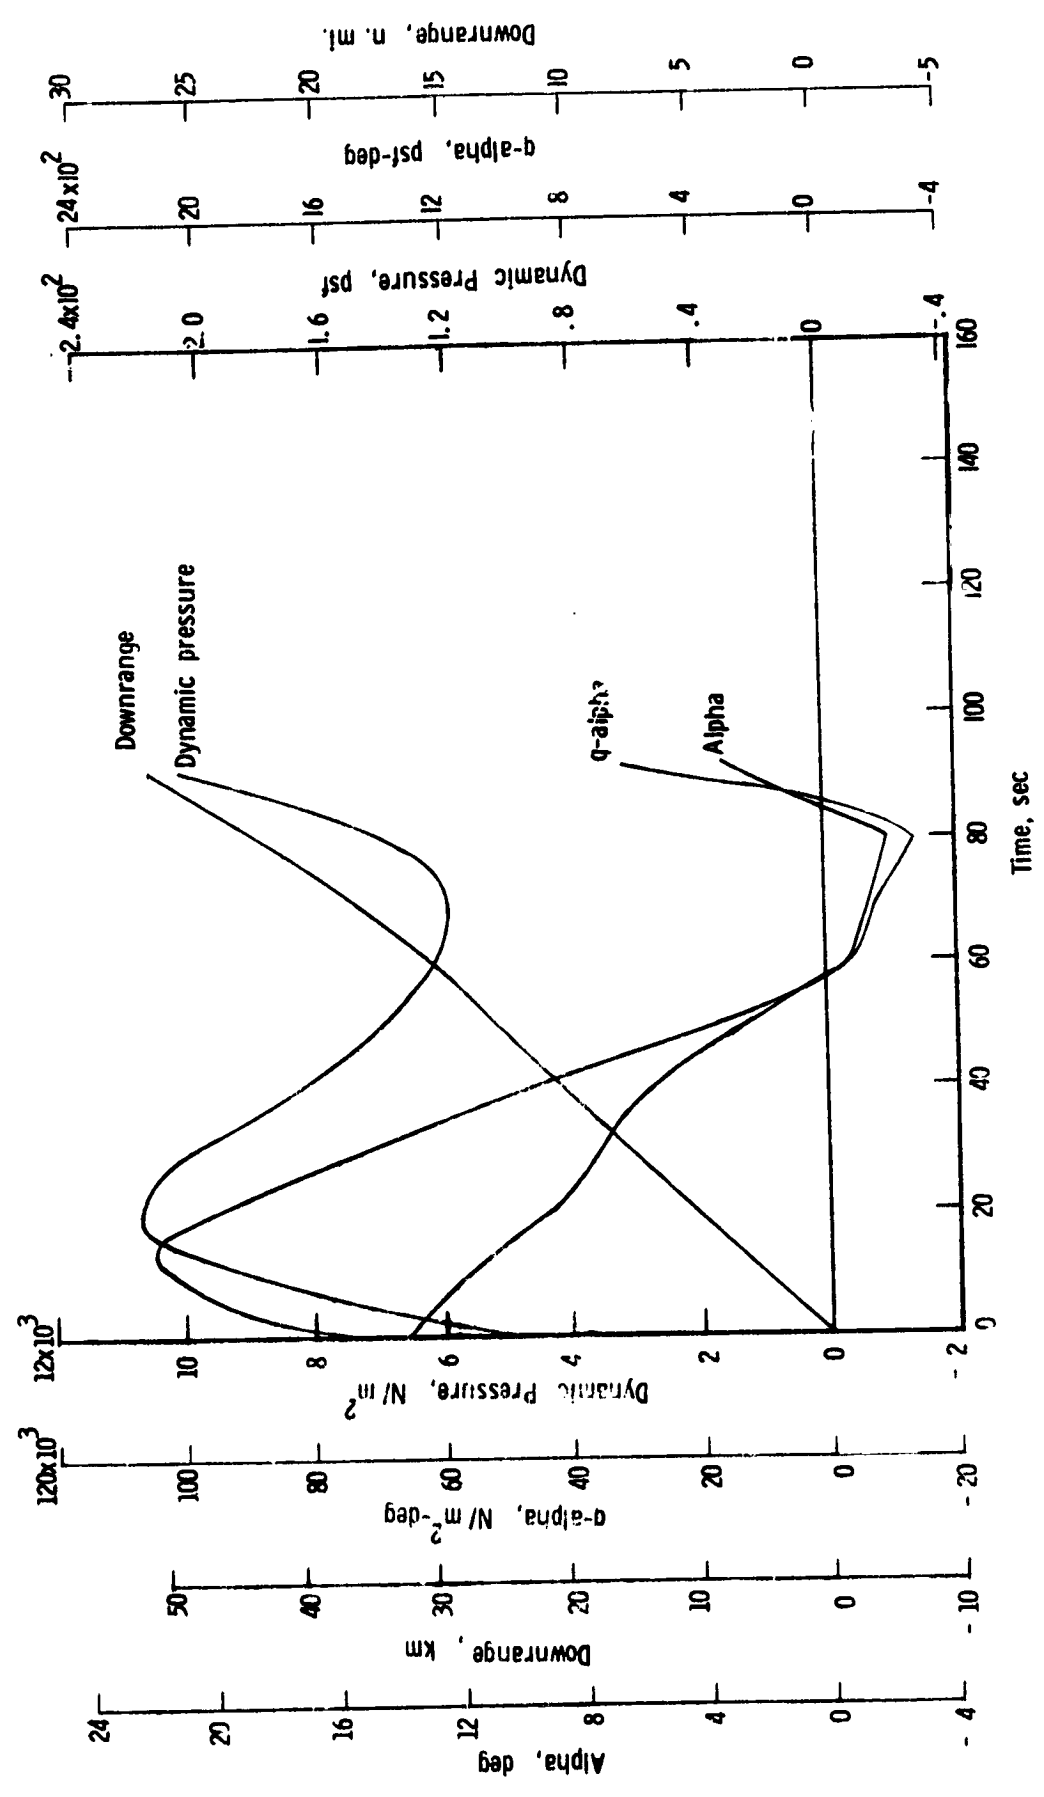


(b) Angle of attack, dynamic pressure, q-alpha, and downrange.

Figure 13. - Concluded.



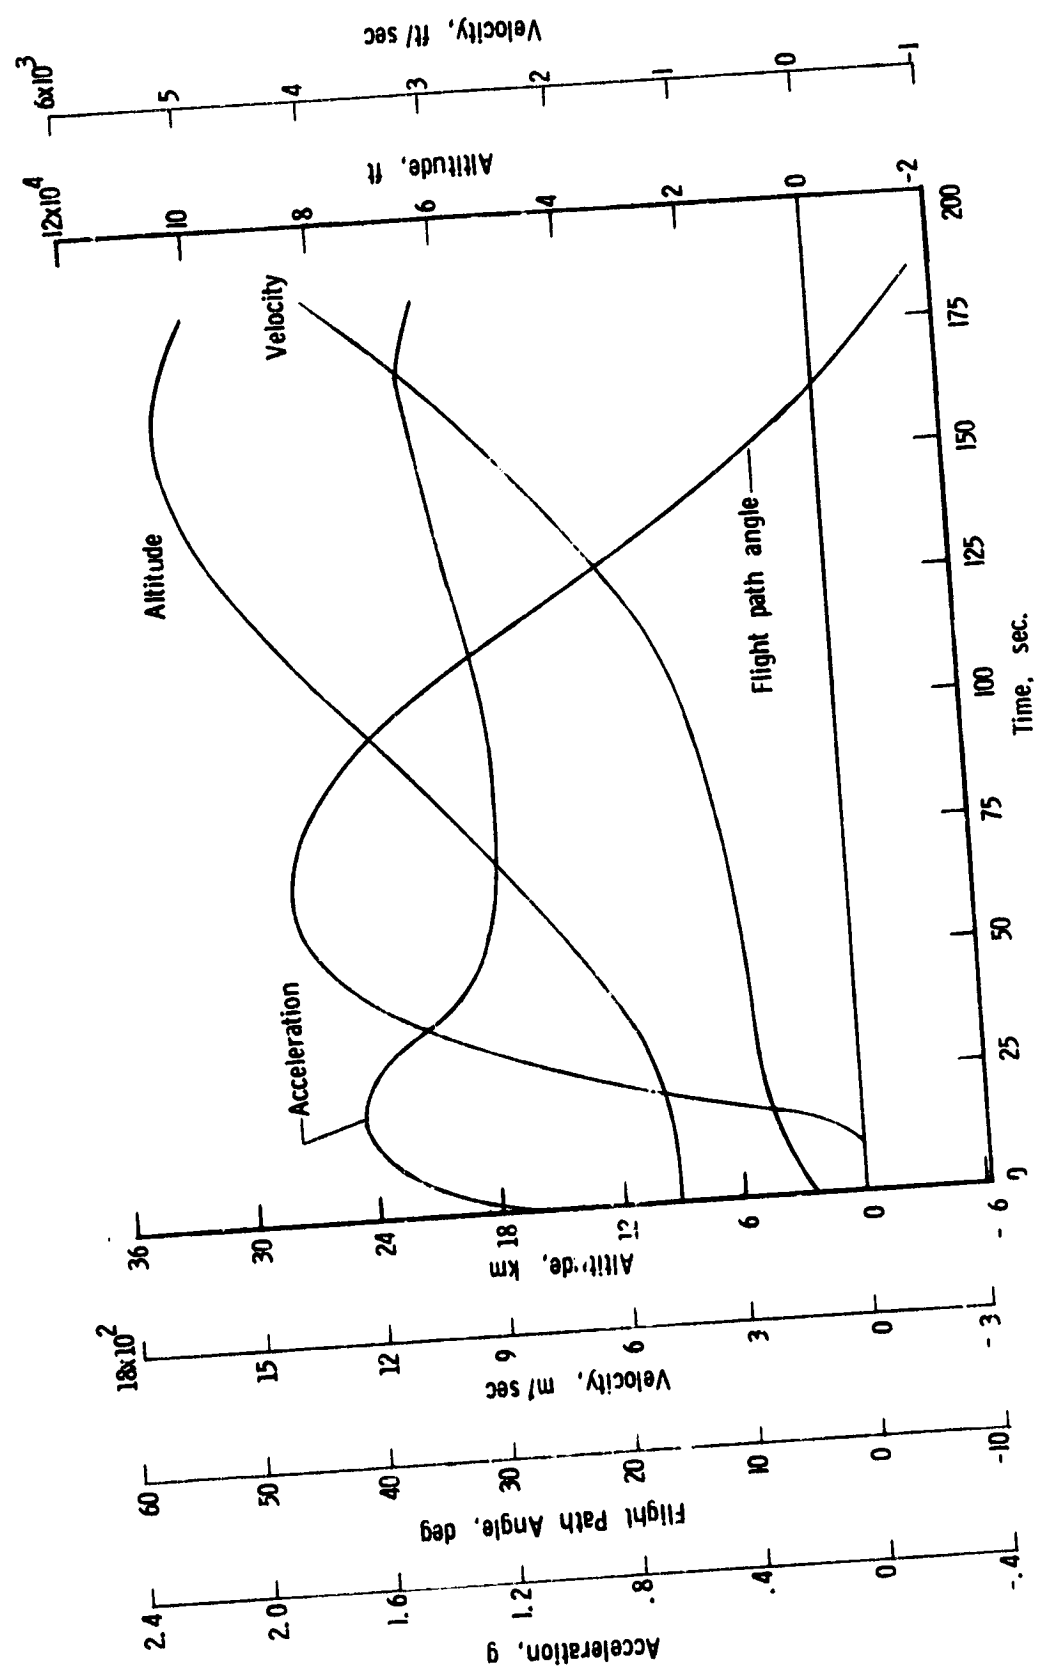


(a) Altitude, velocity, flight path angle, and total acceleration.  
Figure 14.- Airlaunched with 45,360 kg (100,000 lb) of propellant, J-2 powered.

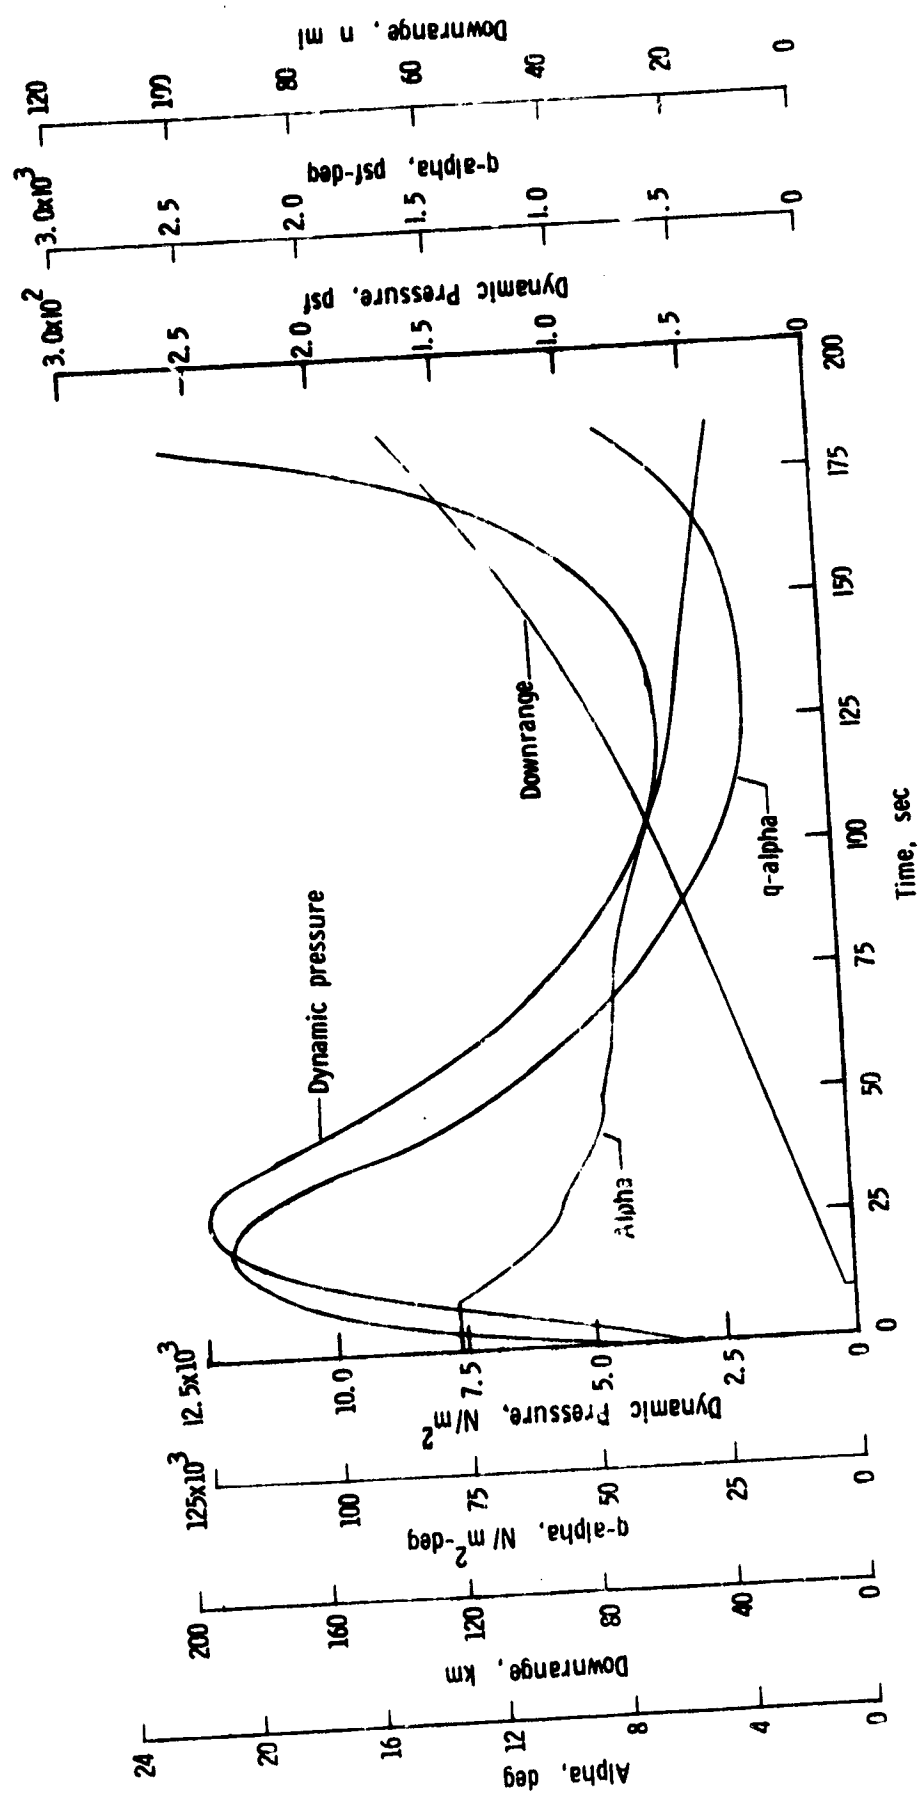


(b) Angle of attack, dynamic pressure, q-alpha, and downrange.

Figure 14. - Concluded.

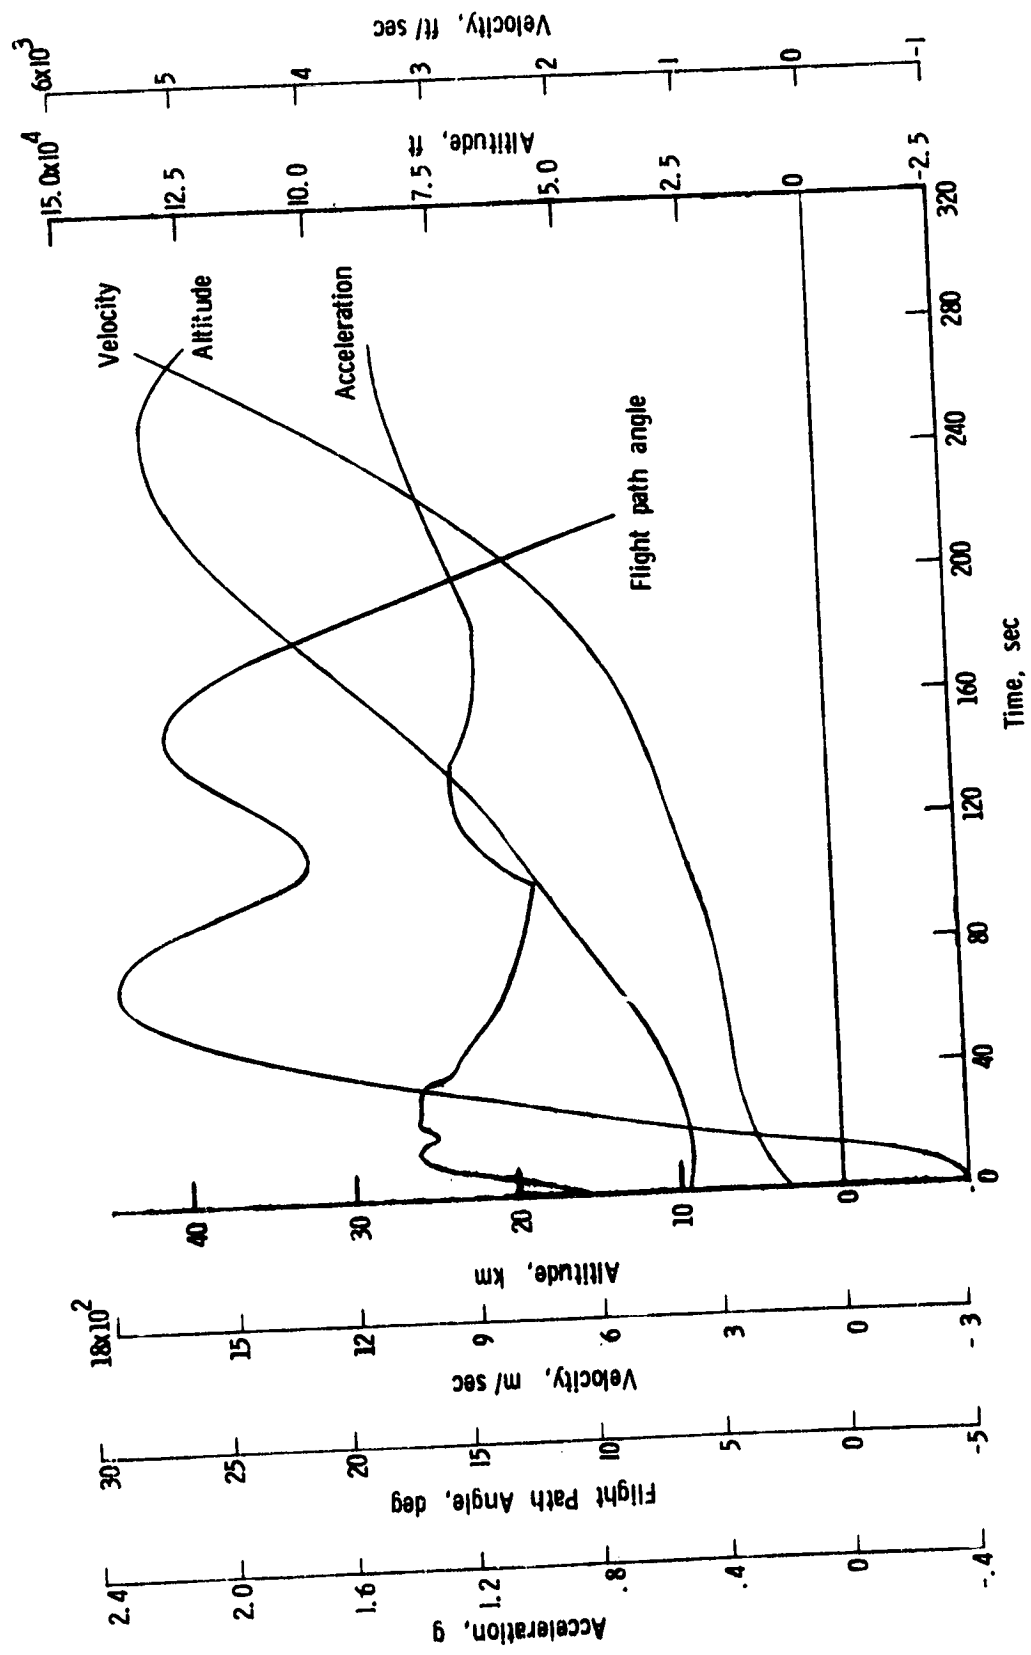

(a) Altitude, velocity, flight path angle, and total acceleration.

Figure 15.- Air-launched with 68,040 kg (150,000 lb) of propellant, J-2 powered.

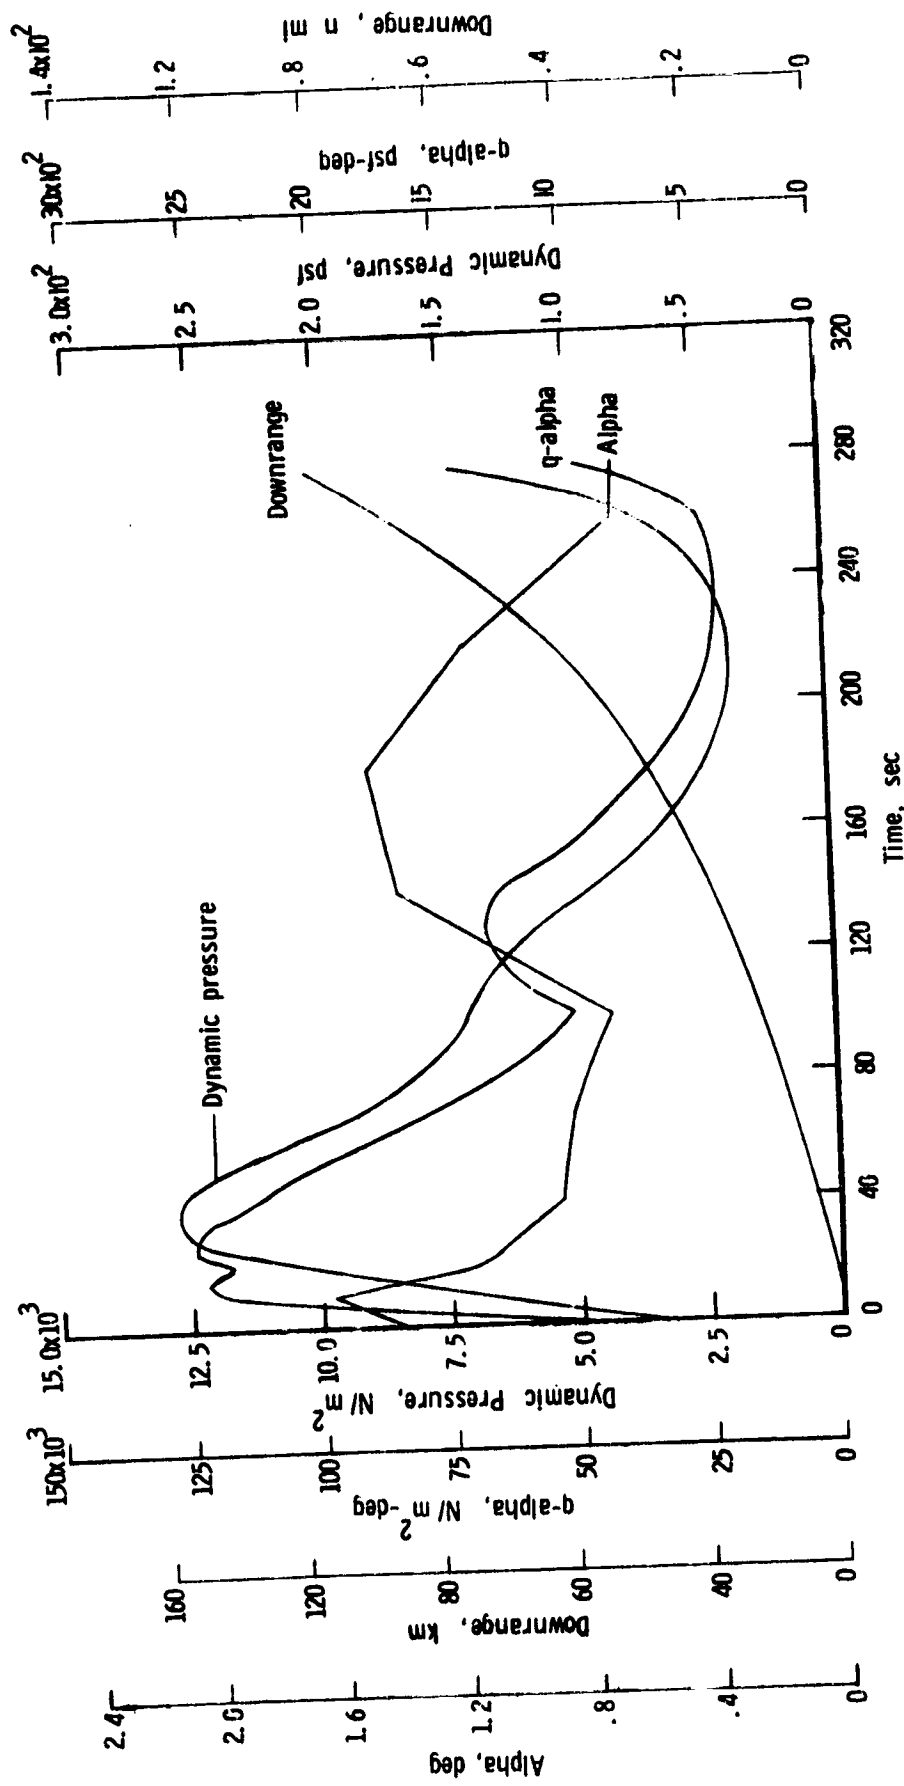

(b) Angle of attack, dynamic pressure, q-alpha, and downrange.

Figure 15. - Concluded.

Downrange:

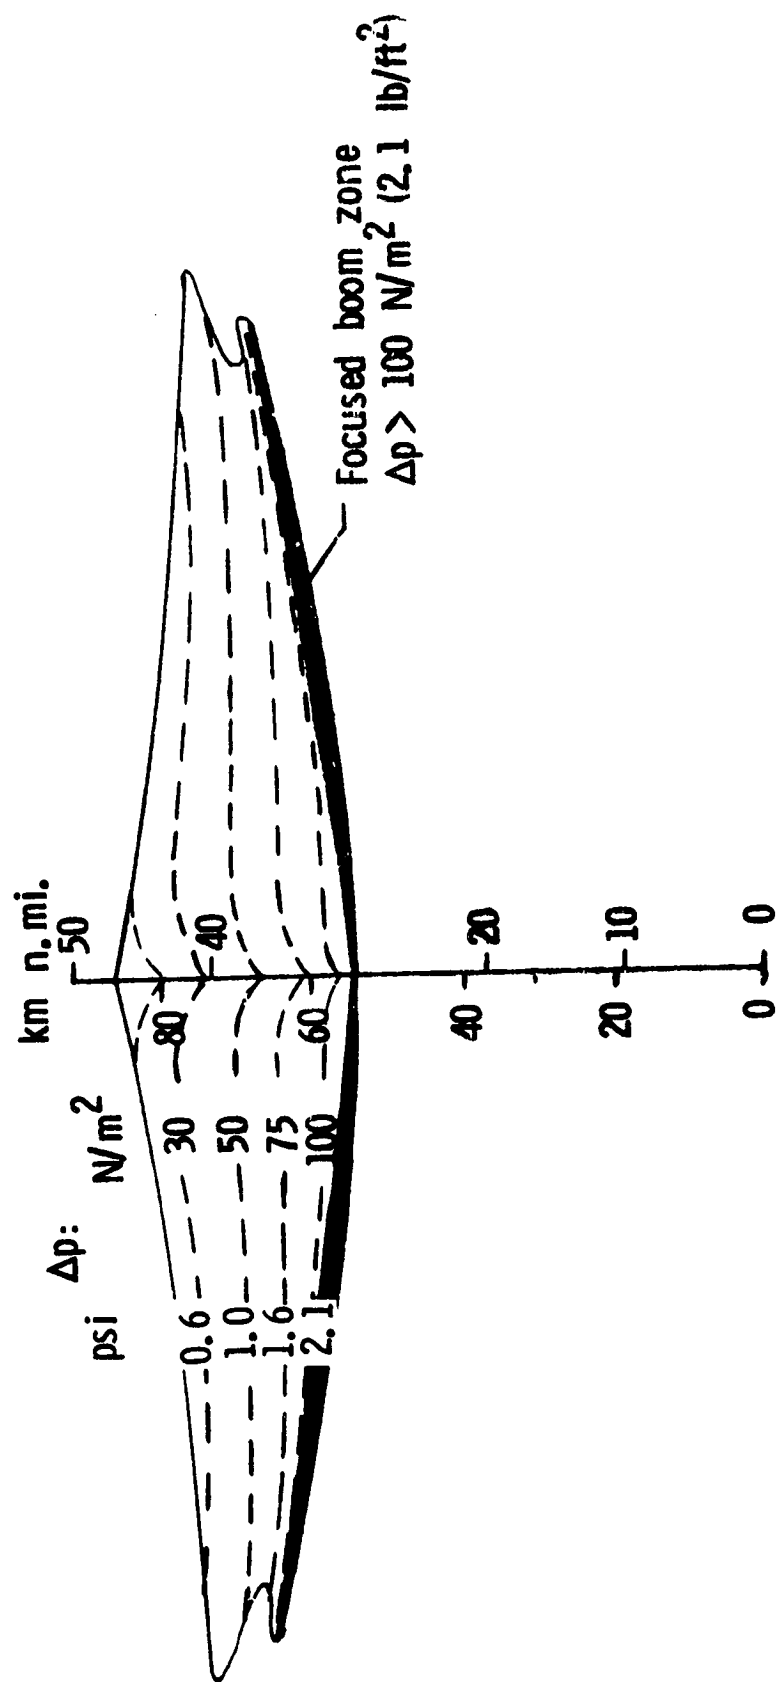


Figure 16. - Focused sonic-boom footprint.